






SPECIFICATIONS:

Voltage Rating: 50V AC/DC
 Current Rating: 1A AC/DC
 Withstanding Voltage: 500V AC/Minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 100MΩ Min.
 Contact Resistance: 20mΩ Max.
 Applicable Wire Range: AWG#28~32.

Assembly Layout:

A1009H-NP-N0WH

1.00mm Pitch Single Row Housing



Reference Informations:

*Material:

Housing: Nylon 66,UL94V-0/Natural(White)

*Suitable LDZY A1009 series Terminal


*Mates with LDZY A1009 series Wafer

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
02	3.70	2.40	1.00
03	4.70	3.40	2.00
04	5.70	4.40	3.00
05	6.70	5.40	4.00

A1009H-NP-N0WH

1.00mm Pitch Single Row Housing

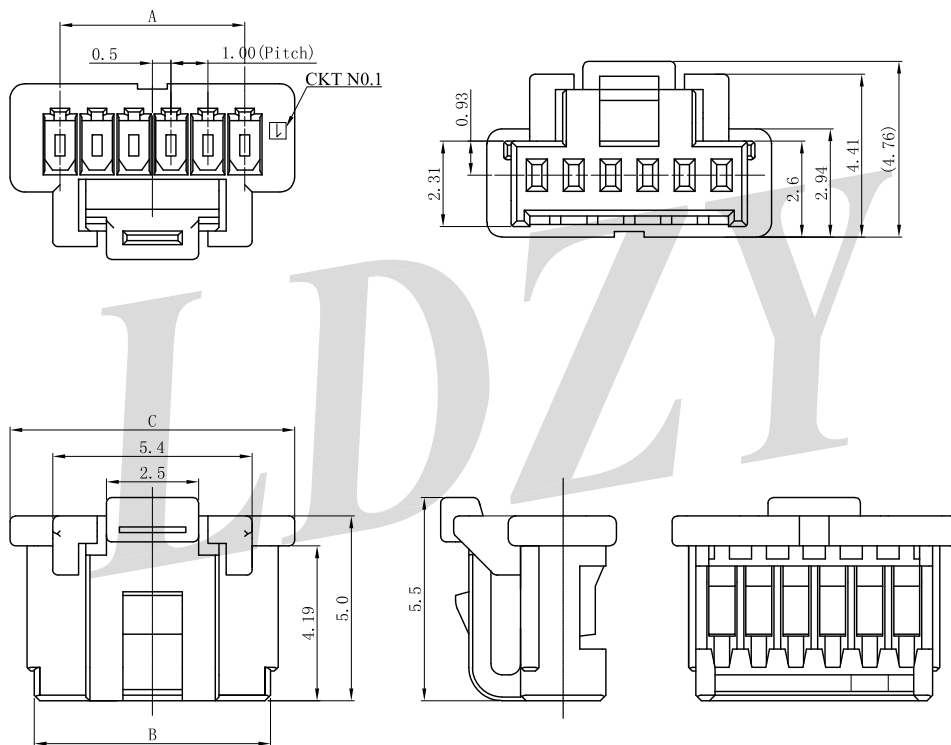

Reference Informations:

*Material:

Housing: Nylon 66,UL94V-0/Natural(White)

*Suitable LDZY A1009 series Terminal


*Mates with LDZY A1009 series Wafer

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
06	7.70	6.40	5.00
07	8.70	7.40	2.00
08	9.70	8.40	3.00
09	10.70	9.40	4.00
10	11.70	10.40	1.00
11	12.70	11.40	2.00
12	13.70	12.40	3.00
13	14.70	13.40	4.00
14	15.70	14.40	3.00
15	16.70	15.40	4.00

A1009 TF-PG1

1.00mm Pitch Terminal

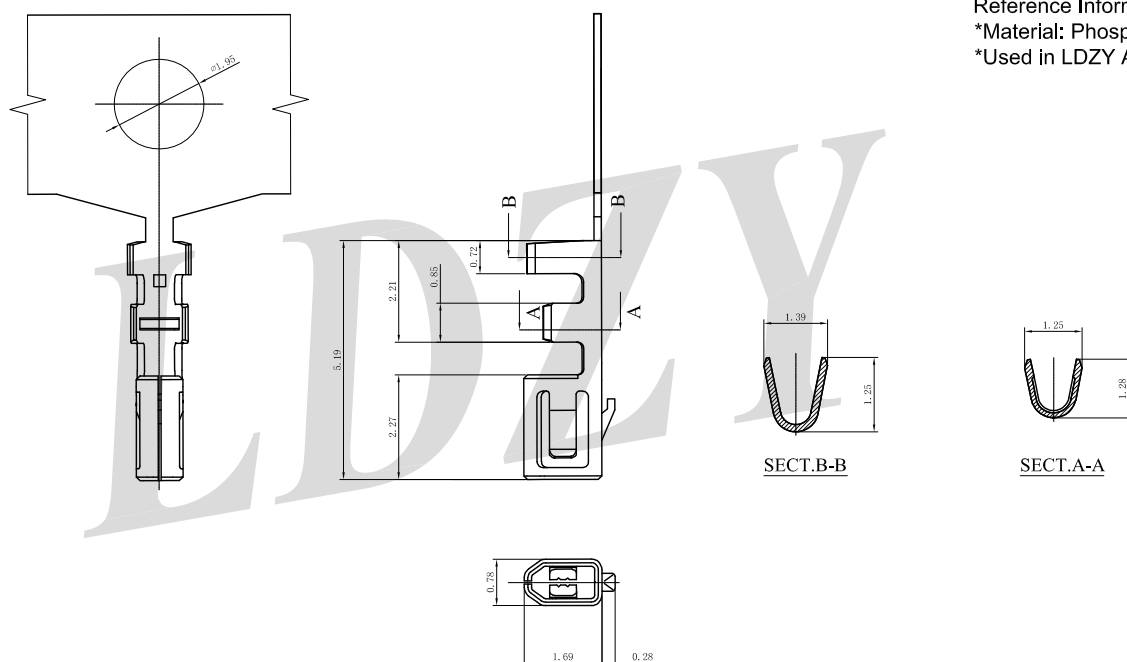

Reference Informations:

*Material: Phosphor Bronze/Gold Plated

*Used in LDZY A1009 series Housing

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1009TF-PG1	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Gold-Plated	20,000pcs