


SPECIFICATIONS:


Voltage Rating: 50V AC/DC
 Current Rating: 1A AC/DC
 Withstanding Voltage: 250V AC/Minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 100MΩ Min.
 Contact Resistance: 20mΩ Max.
 Applicable Wire Range: AWG#28~32.

Assembly Layout:

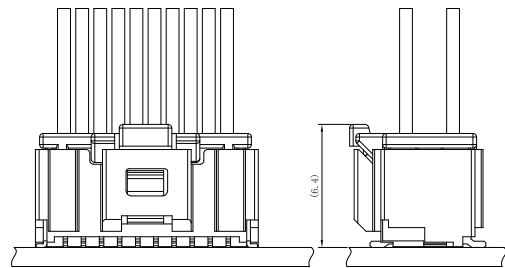

A1014H-2NP-N0NA

1.00mm Pitch Dual Row Housing

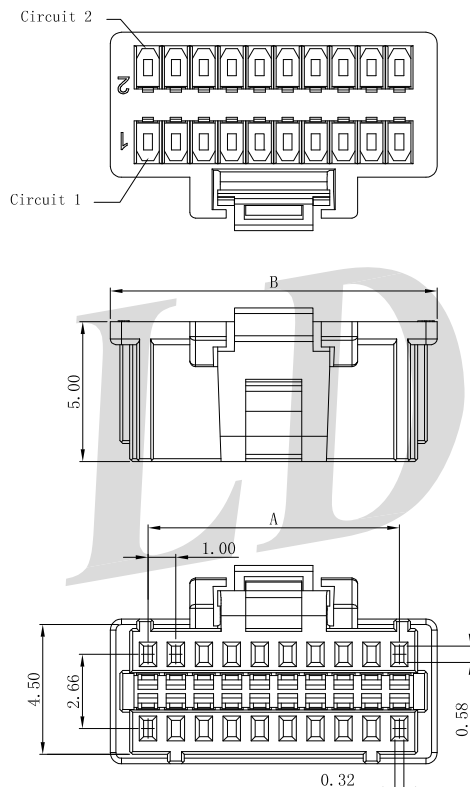

Reference Informations:

*Material:



Housing: Nylon 66,UL94V-0

*Mates with LDZY A1014 series Wafer
 Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
2*2	1.00	3.00	2.40
2*3	2.00	4.00	3.40
2*4	3.00	5.00	4.40
2*5	4.00	6.00	5.40
2*6	5.00	7.00	6.40
2*7	6.00	8.00	7.40
2*8	7.00	9.00	8.40
2*9	8.00	10.00	9.40
2*10	9.00	11.00	10.40
2*11	10.00	12.00	11.40
2*12	11.00	13.00	12.40
2*13	12.00	14.00	13.40
2*14	13.00	15.00	14.40
2*15	14.00	16.00	15.40
2*16	15.00	17.00	16.40
2*17	16.00	18.00	17.40
2*18	17.00	19.00	18.40
2*19	18.00	20.00	19.40
2*20	19.00	21.00	20.40


A1014TF-PG1

1.00mm Pitch Terminal

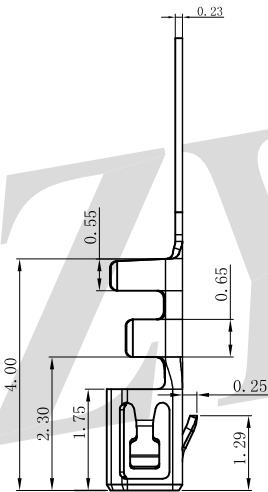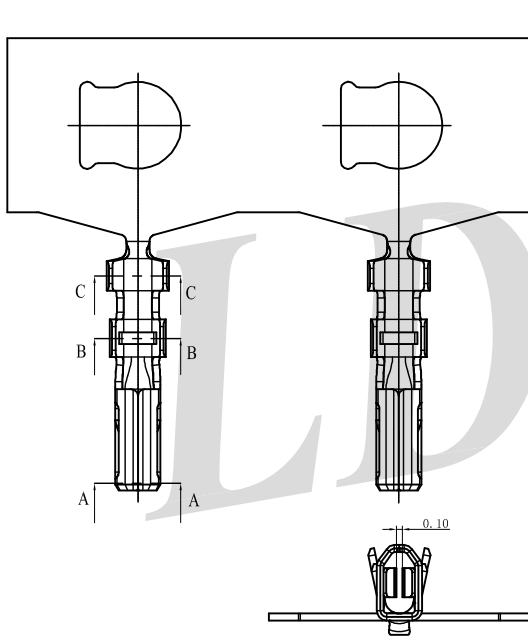


Reference Informations:


- *Material: Phosphor Bronze/Gold Plated
- *Used in LDZY A1014 series Housing



SEC:B-B



SEC:A-A



SEC:C-C



Ordering Information & Specifications

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1014TF-PG1	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Gold-finish	15,000pcs

Note:E-Stamping before Gold-plated

A1014WVS-2NP-6TNAG

1.0mm Pitch 180° SMT Dual Row Wafer

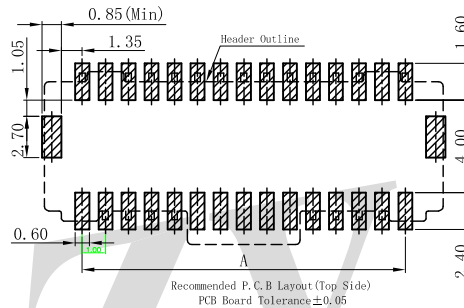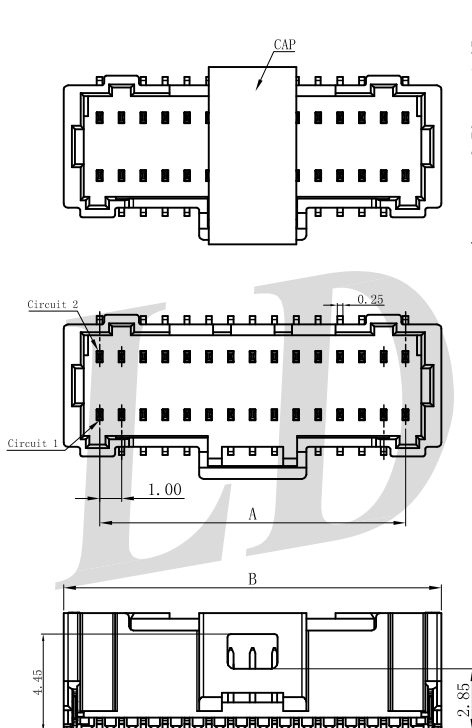

Reference Informations:

*Material:

- PIN: Phosphor Bronze/Gold-plated
- Solder Tabs: Brass/Tin-plated
- Wafer: Nylon 6T, UL94V-0/Natural (Beige)
- Cap: Nylon6T UL94V-0/Natural (Beige)

*Mates with LDZY A1014 series Housing

Poles	Dimensions(mm)	
	A	B
2*10P	9.00	12.30
2*15P	14.00	17.30
2*16P	15.00	18.30
2*20P	19.00	22.30
2*25P	24.00	27.30

Ordering Information & Dimensions