


SPECIFICATIONS:

Voltage Rating: 200V AC/DC
Current Rating: 1A AC/DC
Withstanding Voltage: 500V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 100MΩ Min.
Contact Resistance: 20mΩ Max.
Applicable Wire Range: AWG#28~32.

Assembly Layout:





A1015H-30-46RE

1.00mm Pitch Single Row Housing


Reference Informations:

- *Material:
- Housing: Nylon46 UL94V-0,Red
- *Suitable LDZY A1006 series Terminal
- *Mates with LDZY A1006 series Wafer

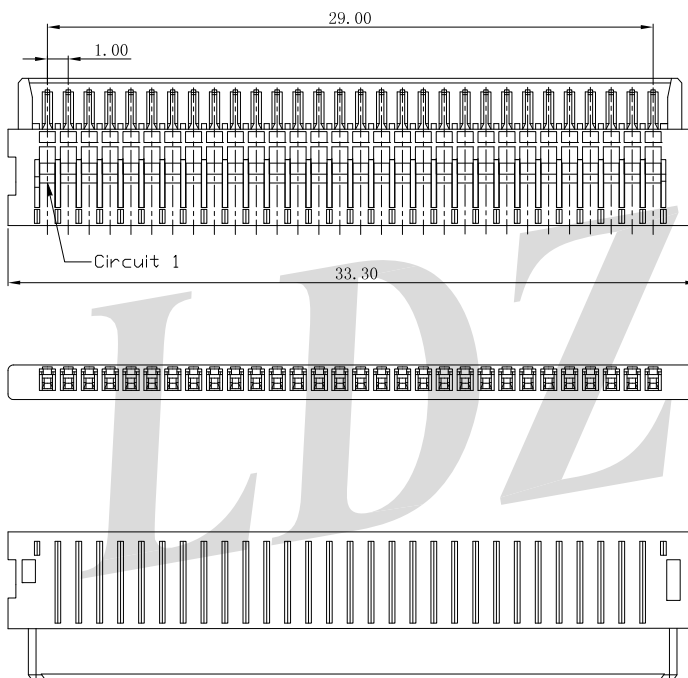

A1006TM-PGX

1.00mm Pitch Single Row Housing

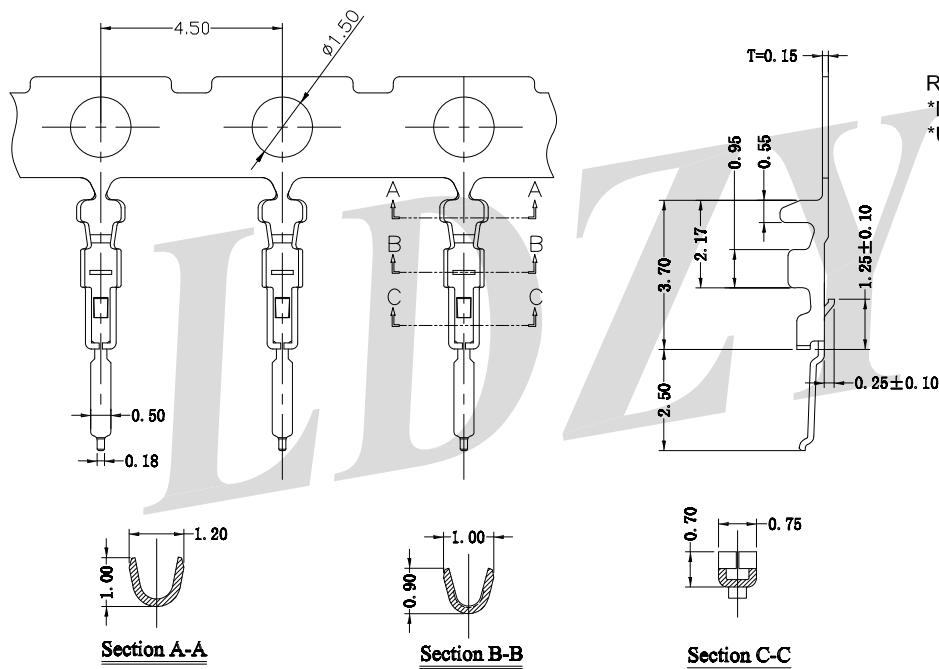


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1006TM-PGX	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Gold Finish	15,000pcs

Note:E-Stamping before Tin-plated

A1006WRS-NP-L0NAG

1.0mm Pitch 90° SMT Single Row Wafer

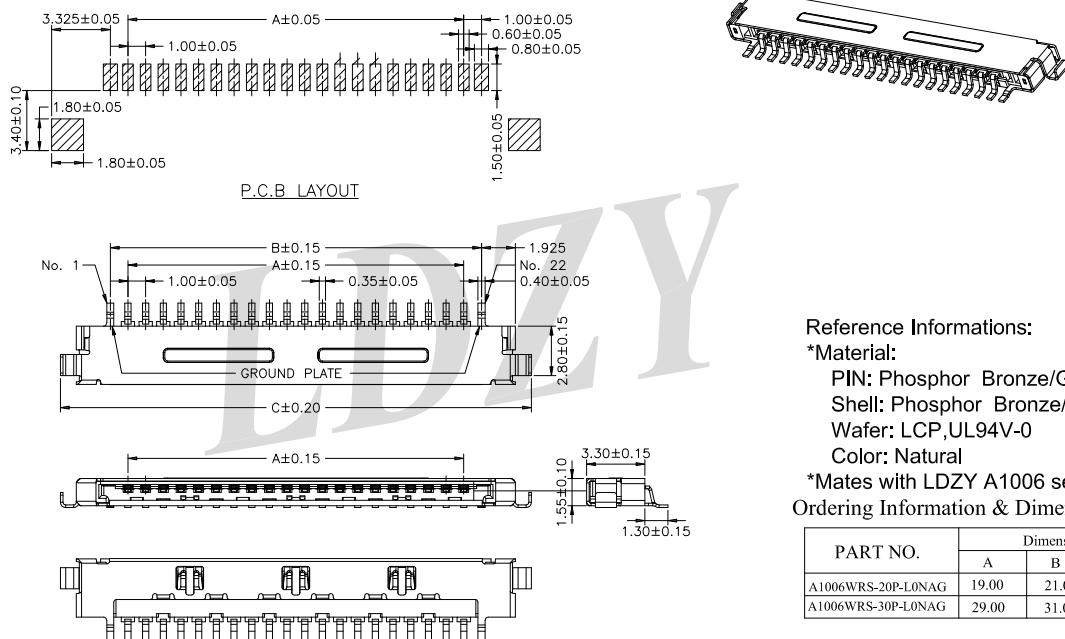

Reference Informations:

*Material:

PIN: Phosphor Bronze/Gold-flash

Shell: Phosphor Bronze/Tin-plated

Wafer: LCP,UL94V-0

Color: Natural

*Mates with LDZY A1006 series Housing

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
A1006WRS-20P-L0NAG	19.00	21.00	26.65
A1006WRS-30P-L0NAG	29.00	31.00	36.65