



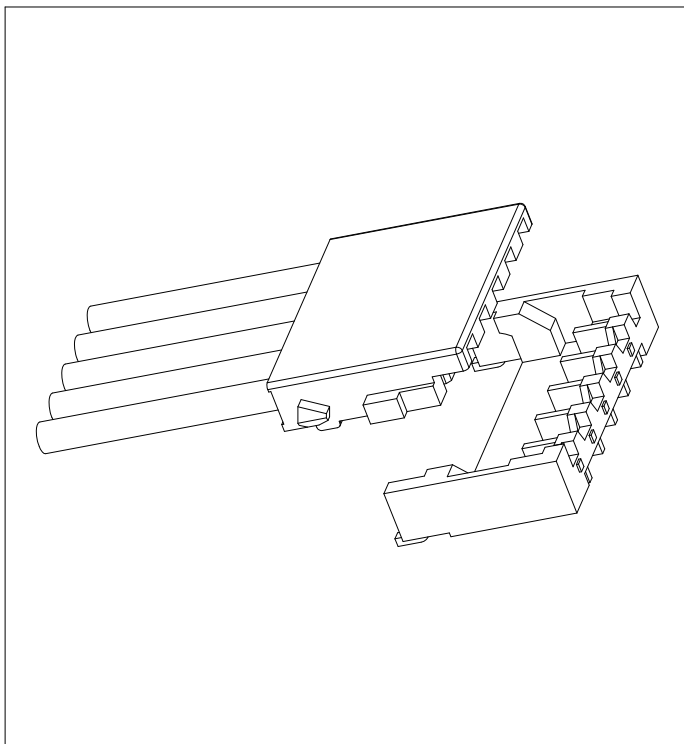

SPECIFICATIONS:


Voltage Rating: 50V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 500V AC/Minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 100MΩ Min.
 Contact Resistance: 20mΩ Max.
 Applicable Wire Range: AWG#28~32.

Assembly Layout:



A1204HX-NP-P0WH

1.20mm Pitch Single Row Housing

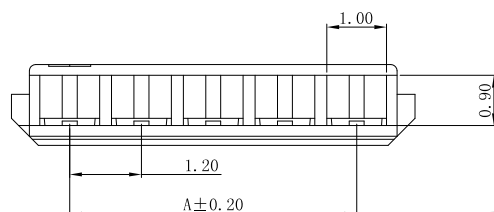


Reference Informations:

*Material:


Housing: PBT UL94V-0/White

*Suitable LDZY A1204 series Terminal
 Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
2	1.20	2.98	2.55	3.15
3	2.40	4.18	3.75	4.35
4	3.60	5.38	4.95	5.55
5	4.80	6.58	6.15	6.75
6	6.00	7.78	7.35	7.95

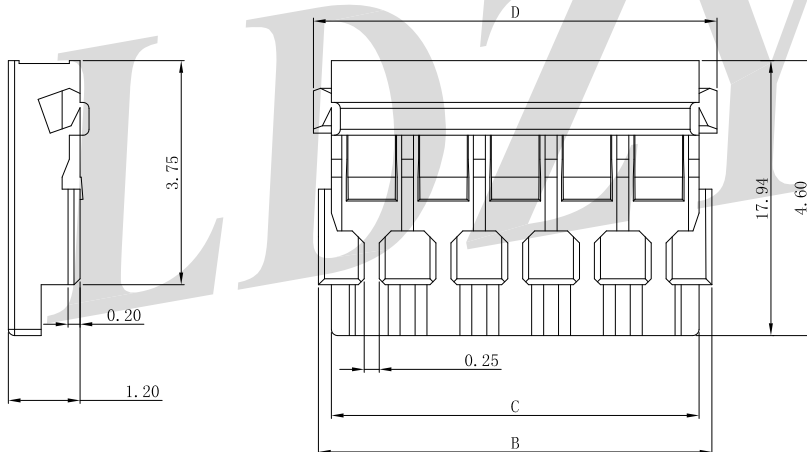


A1204H-NP-P0WH

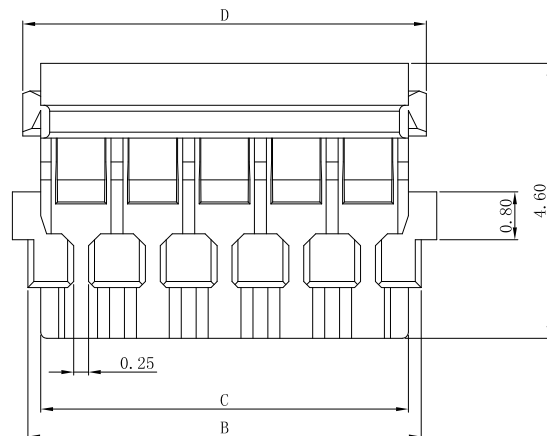

A1204HA-NP-P0WH

A1204TF-PG1

1.20mm Pitch Terminal

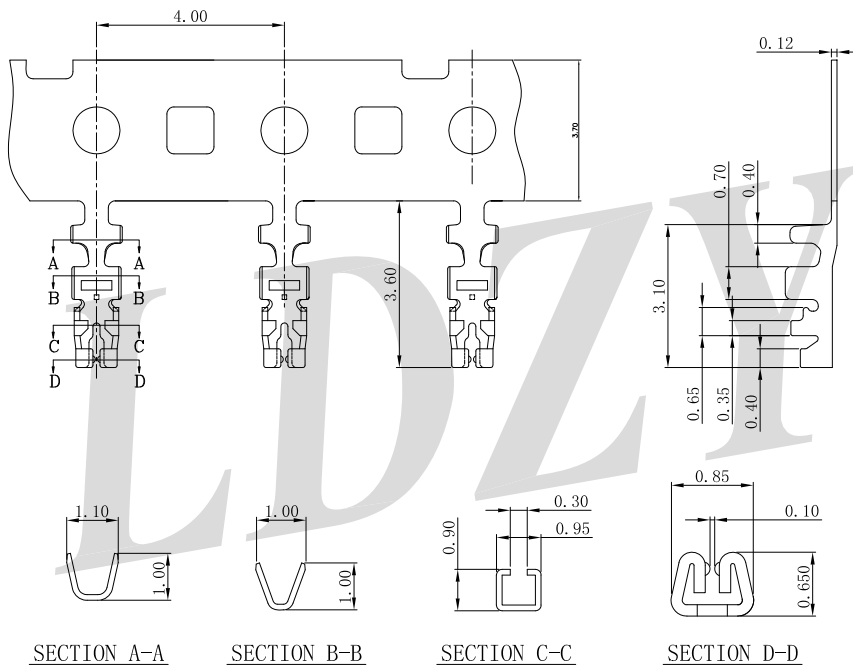

Reference Informations:


- *Material: Phosphor Bronze/Gold flash
- *Mates with LDZY A1204 series Housing

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1204TF-PG1	AWG#28-#32	0.63mm(max)	Phosphor Bronze	Gold flash	30,000pcs

A1204WRS-NP-L0BKM

1.20mm Pitch 90° SMT Single Row Wafer

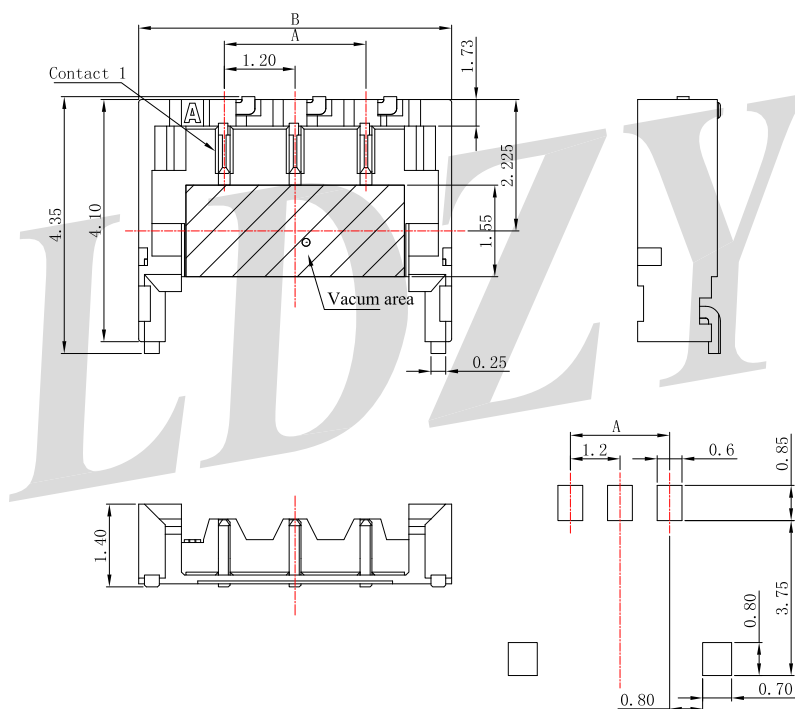

Reference Informations:

- *Material:
- PIN: Brass/Matte Tin Plated
- Solder Tabs: Brass/Matte Tin Plated
- Wafer: LCP,UL94V-0 / Black
- *Suitable LDZY A1204 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2	1.20	4.10
3	2.40	5.30
4	3.60	6.50
5	4.80	7.70
6	6.00	8.90

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05