



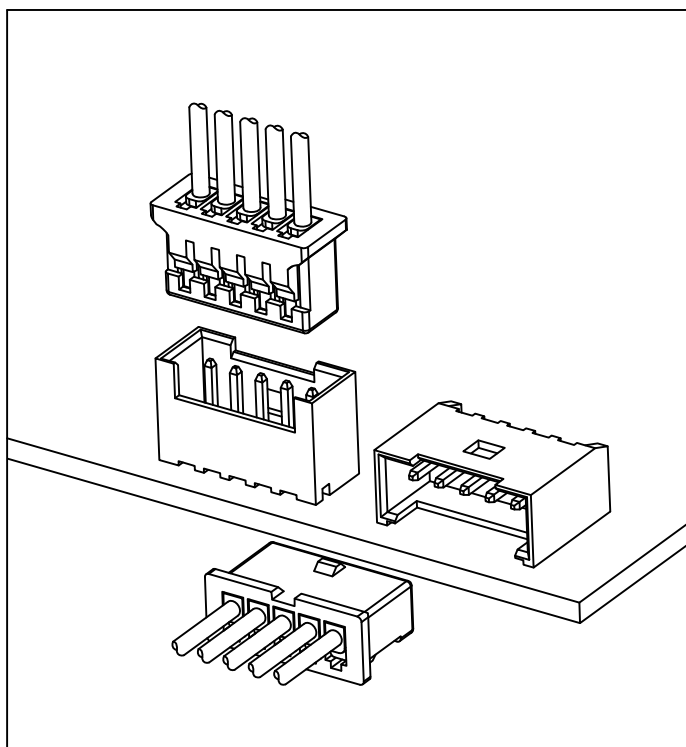

SPECIFICATIONS:


Voltage Rating: 200V AC/DC
Current Rating: 1A AC/DC
Withstanding Voltage: 500V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 100MΩ Min.
Contact Resistance: 20mΩ Max.
Applicable Wire Range: AWG#28-32.

Assembly Layout:

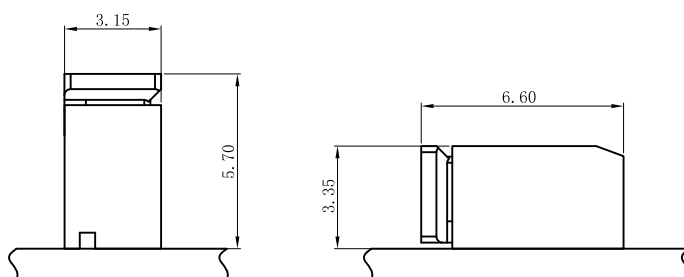

A1251H-NP-N0BN

1.25mm Pitch Single Row Housing

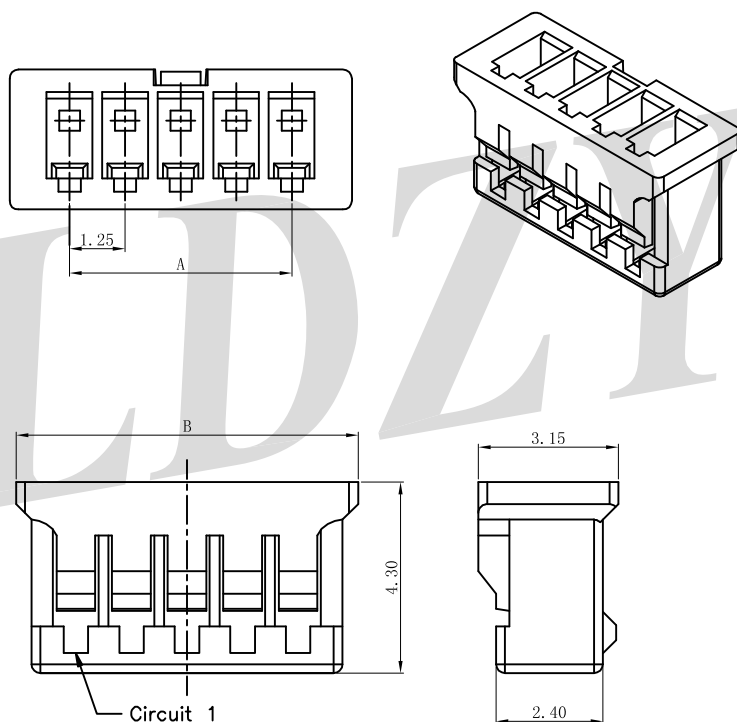

Reference Informations:

*Material:
Housing: PA66 UL94V-0/Brown
*Suitable LDZY A1251 series Terminal
*Mates with LDZY A1251 series Wafer

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2	1.25	3.95
3	2.50	5.20
4	3.75	6.45
5	5.00	7.70
6	6.25	8.95
7	7.50	10.20
8	8.75	11.45
9	10.00	12.70
10	11.25	13.95
11	12.50	15.20
12	13.75	16.45
13	15.00	17.70
14	16.25	18.95
15	17.50	20.20


A1251TF-PT1

1.25mm Pitch Terminal

Reference Informations:

*Material: Phosphor Bronze/Tin-plated

*Mates with LDZY A1251 series Housing

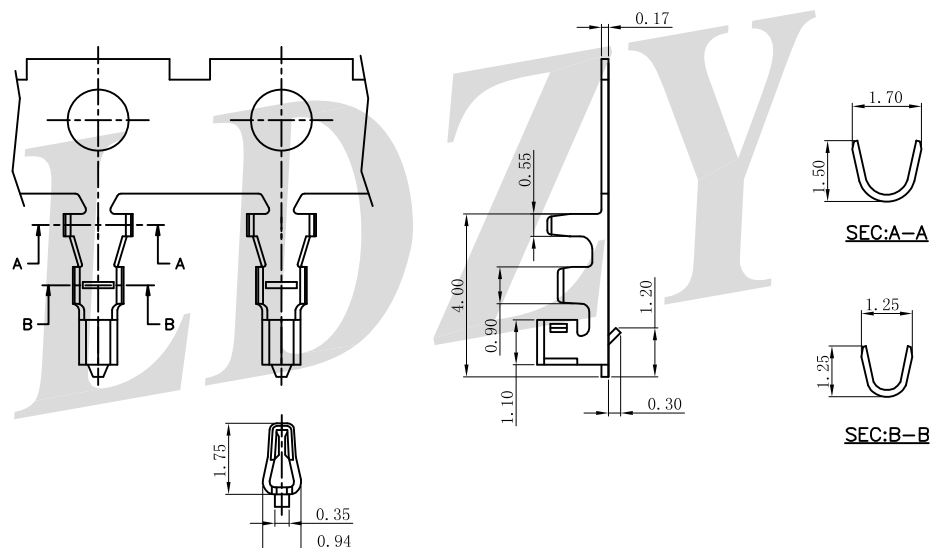


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1251TF-PG1	AWG#28-#32	1.00mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

A1251WR-02-N0BNT

1.25mm Pitch Single Row Wafer

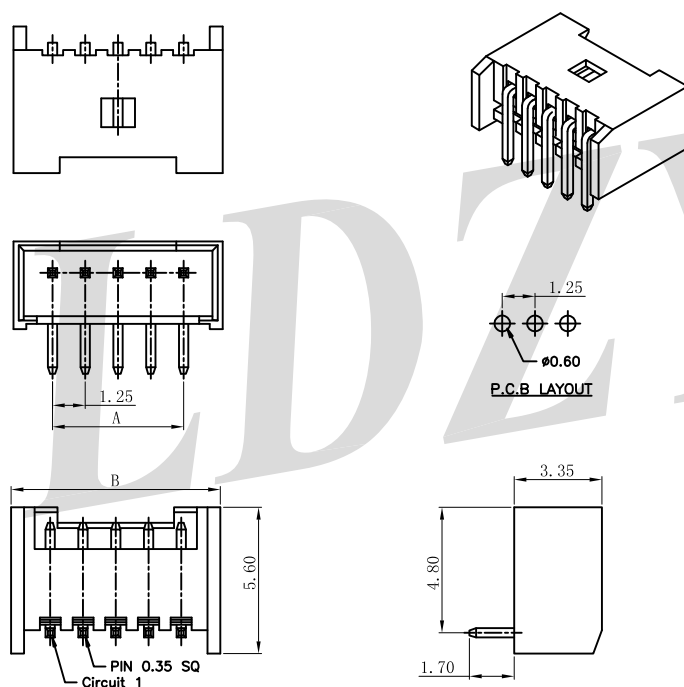

Reference Informations:

*Material:

PIN: Brass/Tin-plated

Wafer: PA66 UL94V-0/Brown



*Suitable LDZY A1251 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2	1.25	3.95
3	2.50	5.20
4	3.75	6.45
5	5.00	7.70
6	6.25	8.95
7	7.50	10.20
8	8.75	11.45
9	10.00	12.70
10	11.25	13.95
11	12.50	15.20
12	13.75	16.45
13	15.00	17.70
14	16.25	18.95
15	17.50	20.20

A1251WV-02-N0BNT

1.25mm Pitch Single Row Wafer

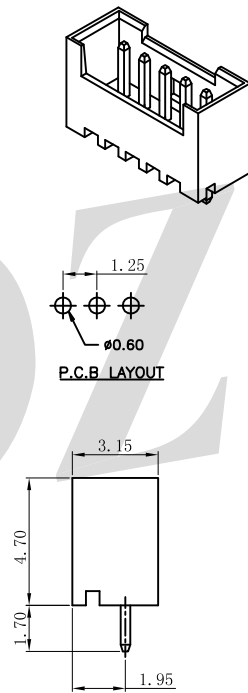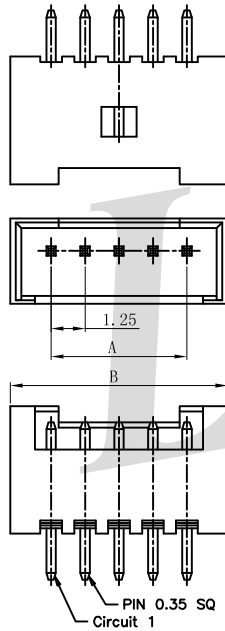

Reference Informations:

*Material:

PIN: Brass/Tin-plated

Wafer: PA66 UL94V-0/Brown

*Suitable LDZY A1251 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2	1.25	3.95
3	2.50	5.20
4	3.75	6.45
5	5.00	7.70
6	6.25	8.95
7	7.50	10.20
8	8.75	11.45
9	10.00	12.70
10	11.25	13.95
11	12.50	15.20
12	13.75	16.45
13	15.00	17.70
14	16.25	18.95
15	17.50	20.20