

- Specifications :
- Voltage Rating: 150V AC / DC

• Current Rating: 1A AC / DC

• Withstanding Voltage: 500V AC/Minute

• Temperature Range: -25°C~+85°C

• Insulation Resistance: 1000MΩ/Min

• Contact Resistance: 30mΩ/Max

• After Environmental Testing: 50mΩ/Max

• *Mates with LDZY A1258 series Wafer

■ *Material:

Material: Nylon 66,UL94V-0,

Color:White

A1258

H

-

2NP

-

N0

WH

①

②

③

④


⑤

- ① Series No.
- ② Plastic Shell Category: H-Housing
- ③ Circuit No.: 210-2*5PIN.....240-2*20PIN
- ④ Material: N0-Nylon66,UL94V-0,
N2-Nylon66,UL94V-2
- ⑤ Color: WH-White





Ordering Information & Dimensions

Poles	Dimension mm	
	A	B
2*5P	5.00	9.50
2*6P	6.25	10.75
2*7P	7.50	12.00
2*8P	8.75	13.25
2*9P	10.00	14.50
2*10P	11.25	15.75
2*11P	12.50	17.00
2*12P	13.75	18.25
2*13P	15.00	19.50
2*14P	16.25	20.75
2*15P	17.50	22.00
2*16P	18.75	23.25
2*17P	20.00	24.50
2*18P	21.25	25.75
2*19P	22.50	27.00
2*20P	23.75	28.25

						一般公差 GENERAL TOLERANCE	LDZY® 东莞市蓝雁电子有限公司 Electronics DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1258H-2NP-N0WH			
						. X ±0.30					品名 TITLE 1.25mm Crimp Style connectors			
						. XX ±0.20	核准 APPD 审核 CHK 绘图 DR 日期 DATE							
						. XXX ±0.10					单位 UNIT 比例 SCALE 图号 NUMBER 版次 REV MM 1/1 LDZY-8115 A			
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT  	周立鸿	兰 雄	唐文舜	2023/03/02				

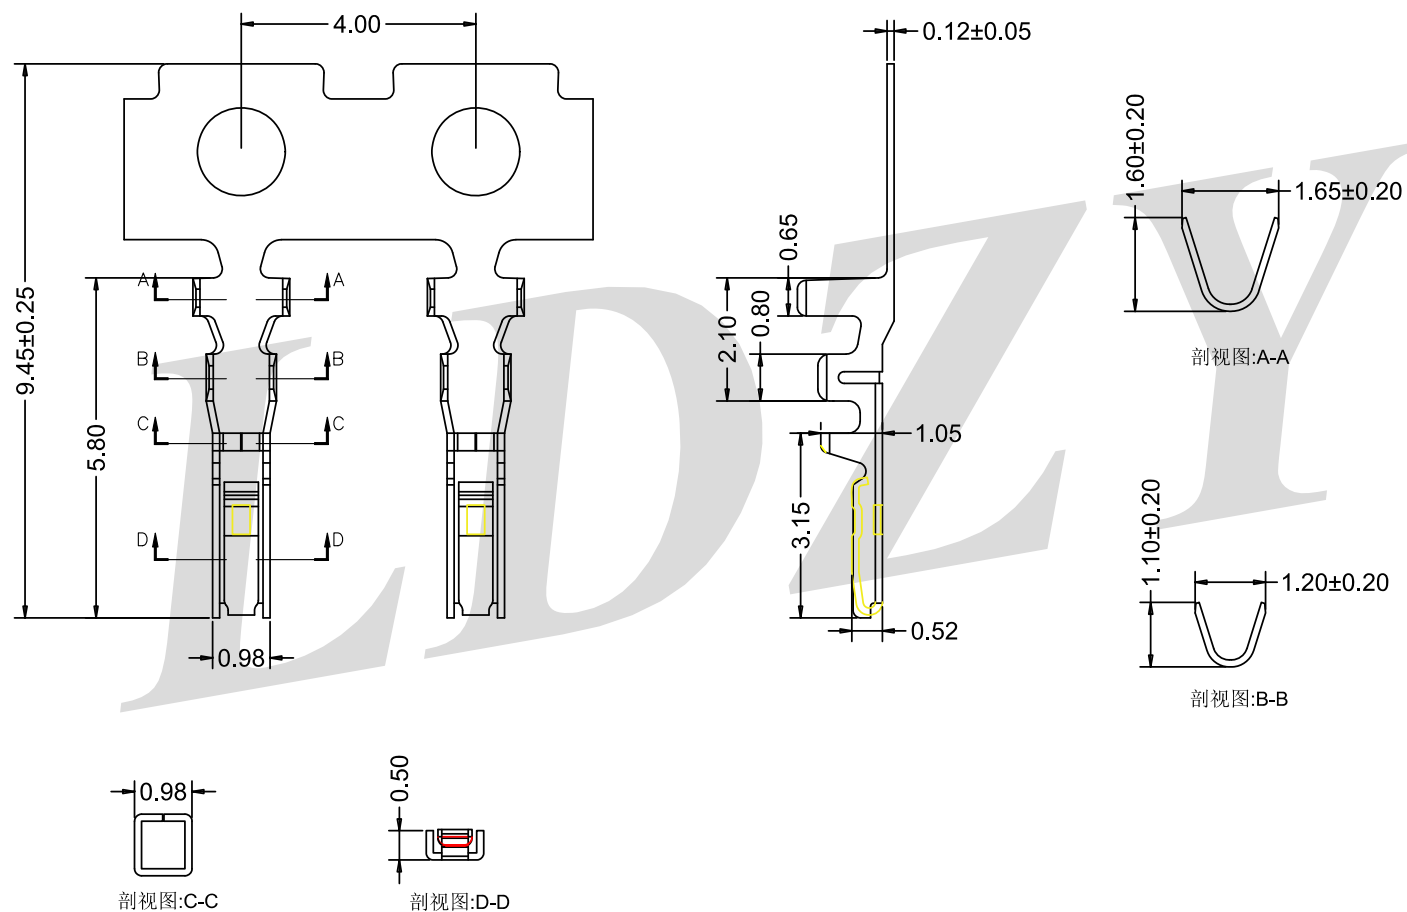

- | | | | | | | | | | | | | | | |
|---------|----------------|----------------|------------------|--------|---------|--|---|--------|-------|------------|--|-----------------|------------------------|-------------|
| | | | | | | 一般公差
GENERAL TOLERANCE | <div><div><div>LDZY[®]</div><div>Electronics</div></div><div><div>东莞市蓝雁电子有限公司</div><div>DongGuan LDZY Electronics CO.,LTD.</div></div></div> | | | | 料号 PART NO
A1258TF-PT1 | | | |
| | | | | | | . X ±0.30
. XX ±0.20
. XXX ±0.10 | 核准 APPD | 审核 CHK | 绘图 DR | 日期 DATE | 品名 TITLE
4.2mm Crimp Style connectors | | | |
| 日期 DATE | 旧版次
OLD REV | 新版次
NEW REV | 变更内容 DESCRIPTION | 审核 CHK | 核准 APPD | 角法 PROJECT
 | 周立鸿 | 兰雄 | 潘昌文 | 2022/03/02 | 单位 UNIT
MM | 比例 SCALE
1/4 | 图号 NUMBER
LDZY-8115 | 版次 REV
A |

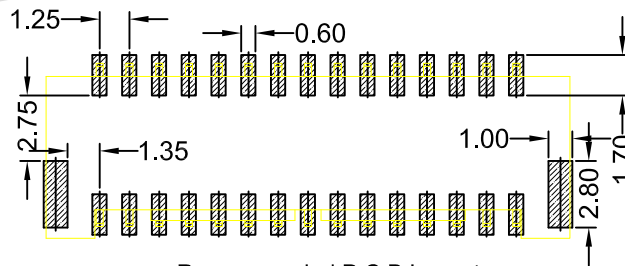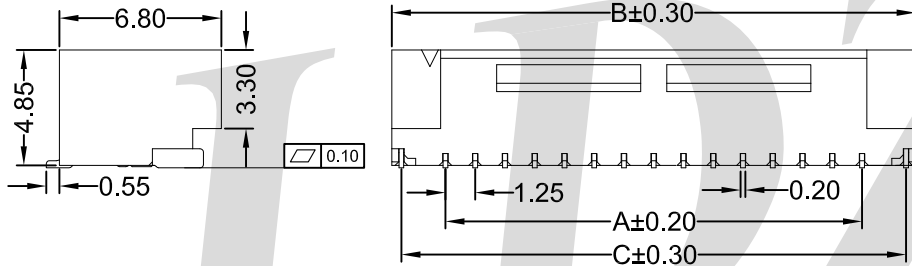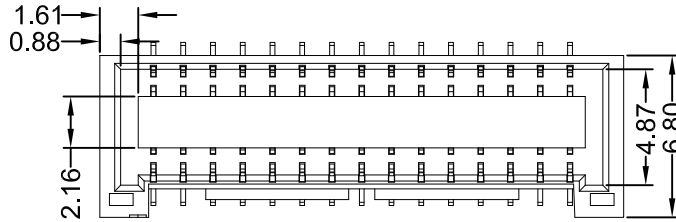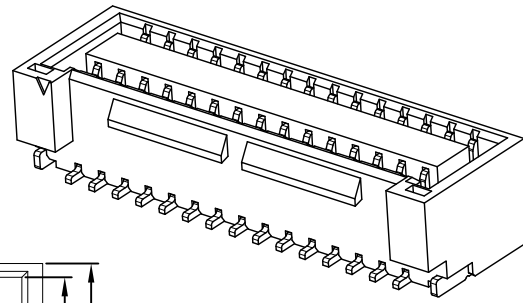

Recommended P.C.B Layout
General Tolerance±0.05

- Specifications(规格):
- Voltage rating(额定电压): 50V AC / DC
 - Current rating(额定电流): 1A AC / DC
 - Withstanding voltage(耐压值): 500V AC/minute
 - Temperature range(工作温度): -25°C~+85°C
 - Insulation resistance(绝缘电阻): ≥1000MΩ
 - Contact resistance(接触电阻): ≤50mΩ


- *Material:
- Plastic Material: LCP UL94V-0, Natural
PIN Material: Phosphor Bronze; Solder Tabs: Brass
Plating Method: Gold plated Or Tin-Plated
Mates with LDZY A1258 series Housing




A1258 W V S - NP - L0 NA X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
② Category: W-wafer
③ Welding Board Angle: V- Straight 180°
④ Soldering Type: Blank-DIP Type, S-SMT Type,
⑤ Circuit No.: 210-2*5PIN~240-2*20PIN,
⑥ Material: L0-LCP UL94V-0,
⑦ Color: NA-Natural,
⑧ Plating Method: T-Tin-Plated, G-Gold plated

Ordering Information & Dimensions

	Dimension mm			Q'ty/Reel
	A	B	C	
2*5P	5.00	9.50	8.70	1000PCS
2*6P	6.25	10.75	9.95	1000PCS
2*7P	7.50	12.00	11.20	1000PCS
2*8P	8.75	13.25	12.45	1000PCS
2*9P	10.00	14.50	13.70	1000PCS
2*10P	11.25	15.75	14.95	1000PCS
2*11P	12.50	17.00	16.20	1000PCS
2*12P	13.75	18.25	17.45	1000PCS
2*13P	15.00	19.50	18.70	1000PCS
2*14P	16.25	20.75	19.95	1000PCS
2*15P	17.50	22.00	21.20	1000PCS
2*16P	18.75	23.25	22.45	1000PCS
2*17P	20.00	24.50	23.70	1000PCS
2*18P	21.25	25.75	24.95	1000PCS
2*19P	22.50	27.00	26.20	1000PCS
2*20P	23.75	28.25	27.45	1000PCS

						一般公差 GENERAL TOLERANCE	 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1258WVS-2NP-L0NAX			
						. X ±0.3					品名 TITLE 1.25mm Crimp Style Connectors			
						. XX ±0.2								
						. XXX ±0.1								
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT 	周立鸿	兰 雄	唐文舜	2022/08/23	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER LDZY-8115	版次 REV A

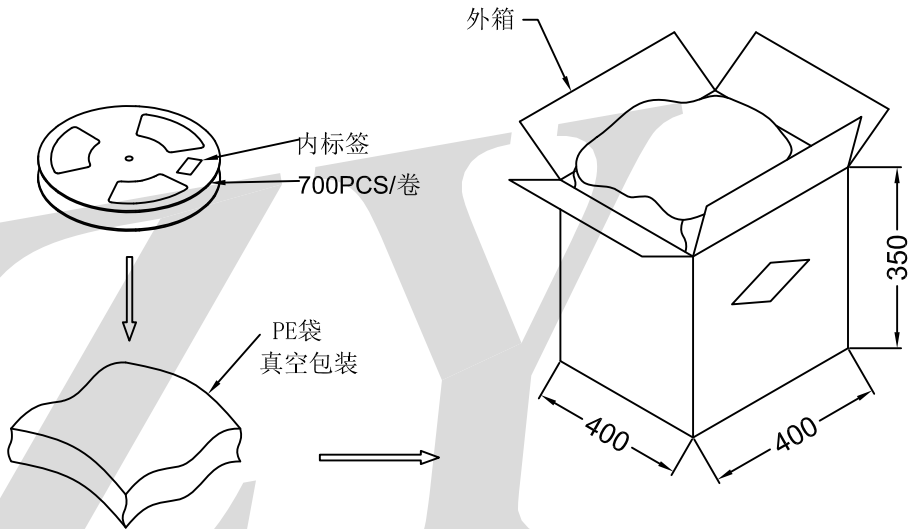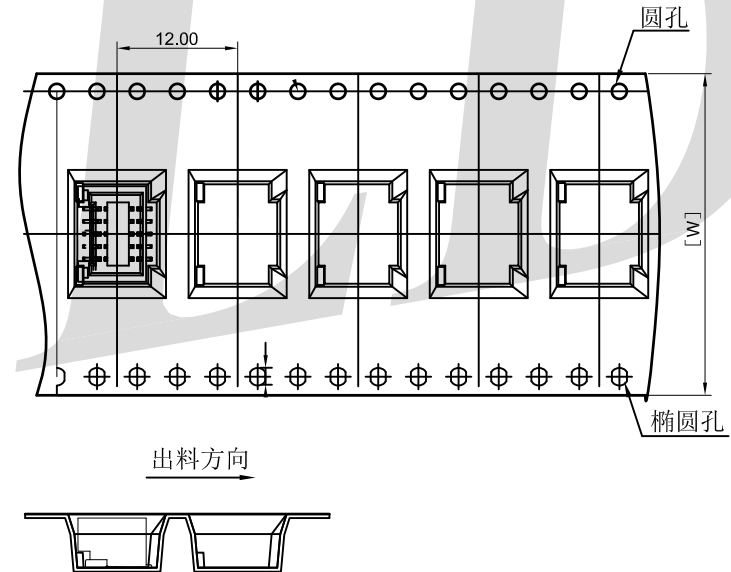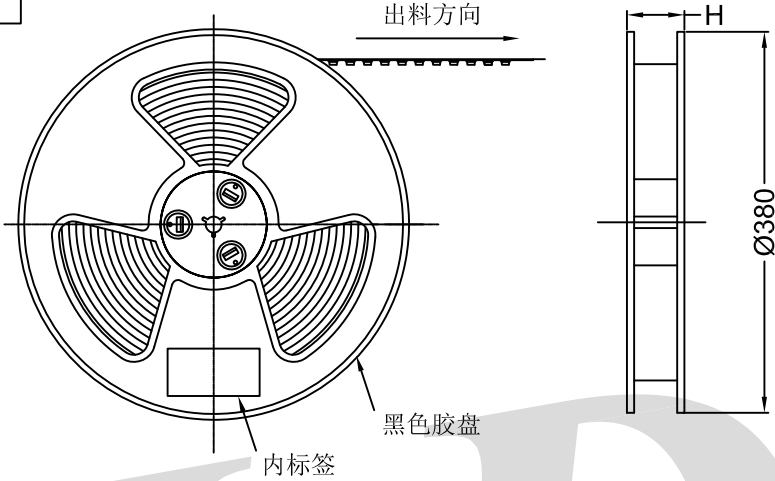

PIN位	W	卷装数量	外箱数量	PIN位	W	卷装数量	外箱数量
2*5P	24	1250PCS	14卷=17500PCS	2*13P	44	1250PCS	7卷=8750PCS
2*6P	24	1250PCS	14卷=17500PCS	2*14P	44	1250PCS	7卷=8750PCS
2*7P	24	1250PCS	14卷=17500PCS	2*15P	44	1250PCS	7卷=8750PCS
2*8P	24	1250PCS	14卷=17500PCS	2*16P	44	1250PCS	7卷=8750PCS
2*9P	32	1250PCS	9卷=11250PCS	2*17P	44	1250PCS	7卷=8750PCS
2*10P	32	1250PCS	9卷=11250PCS	2*18P	44	1250PCS	7卷=8750PCS
2*11P	32	1250PCS	9卷=11250PCS	2*19P	44	1250PCS	7卷=8750PCS
2*12P	32	1250PCS	9卷=11250PCS	2*20P	44	1250PCS	7卷=8750PCS

注:卷带包装时,前、后各空23PCS.

						一般公差 GENERAL TOLERANCE	 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1258WVS-2NP-L0NAX			
						. X ±0.20					品名 TITLE GHD1. 25双排立贴针座卷装包装图			
						. XX ±0.10								
						. XXX ±0.05								
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT 	周立鸿	兰 雄	唐文舜	2022/08/23	单位 UNIT mm	比例 SCALE 1/1	图号 NUMBER LDZY-8115	版次 REV A