


SPECIFICATIONS:




Voltage Rating: 30V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 500V AC/Minute
 Temperature Range: -40°C~+105°C
 Insulation Resistance: 100MΩ Min.
 Contact Resistance: 20mΩ Max.
 Applicable Wire Range: AWG#26~28.

Assembly Layout:



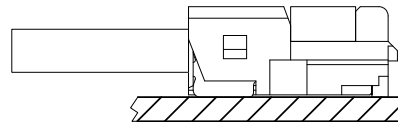


A1300H-NP-N0XX

1.30mm Pitch Single Row Housing

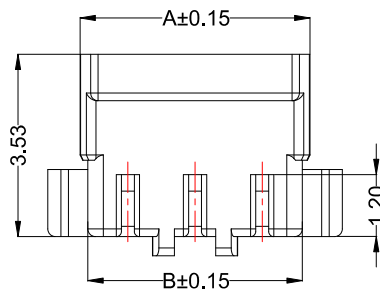

3~12Pin Shape



2Pin Shape

Reference Informations:

*Material:

Housing: PA66 UL94V-0, Natural/BLACK

*Suitable LDZY A1300 series Terminal


*Mates with LDZY A1300 series Wafer

Ordering Information & Dimensions

Poles	Dimensions(mm)		
	A	B	C
02	3.15	2.85	1.30
03	4.45	4.15	2.60
04	5.75	5.45	3.90
05	7.05	6.75	5.20
06	8.35	8.05	6.50
07	9.65	9.35	7.80
08	10.95	10.65	9.10
09	12.25	11.95	10.40
10	13.55	13.25	11.70
11	14.85	14.55	13.00
12	16.15	15.85	14.30

A1300TF-CG1

1.30mm Pitch Terminal

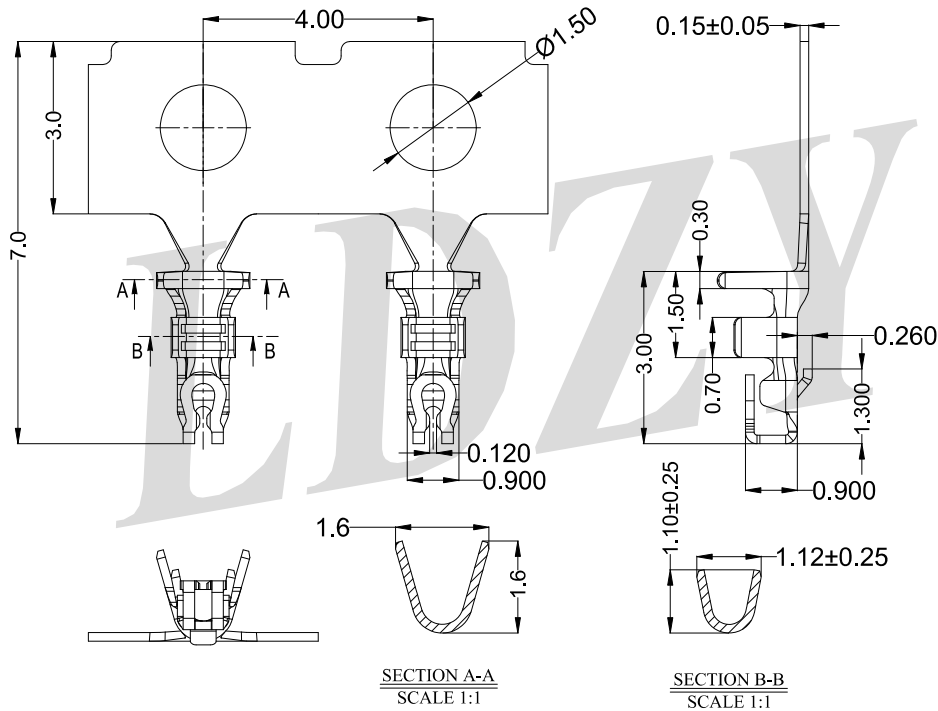

Reference Informations:


- *Material: High conductivity copper, Gold flash
- *Mates with LDZY A1300 series Housing

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1300TF-CG1	AWG#28-#26	0.96mm(max)	High conductivity copper	Gold flash	20,000pcs

A1300WRS-NP-4TXXG

1.30mm Pitch 90° SMT Single Row Wafer

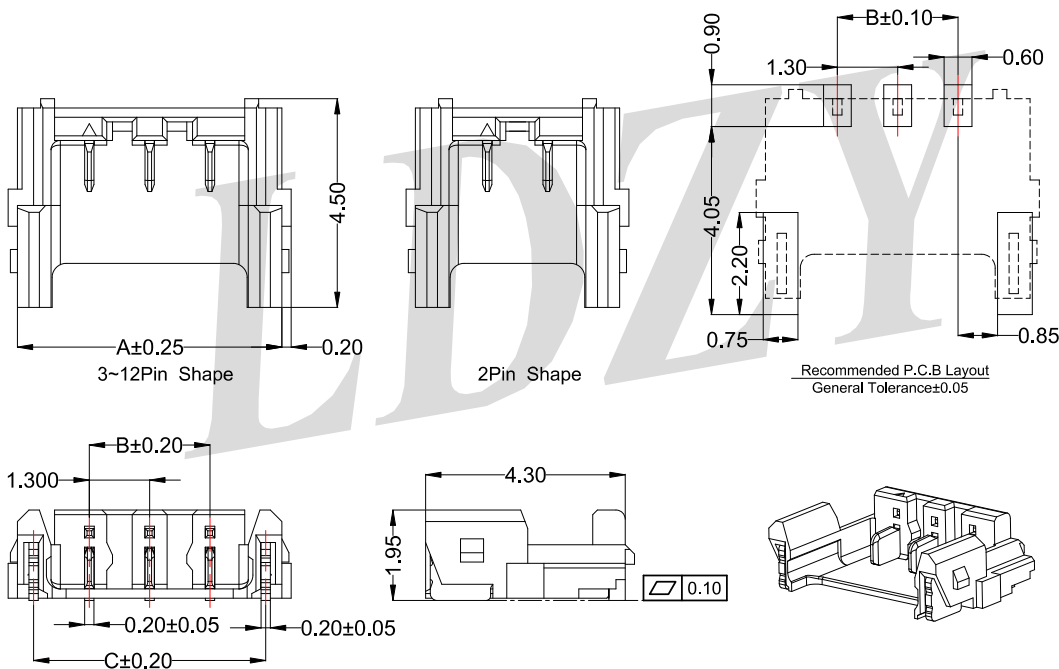

Reference Informations:

- *Material:
Wafer: PA4T,UL94V-0, Natural/BLACK
PIN: Brass Solder Tabs:Brass
Finish: Gold Flash
- *Suitable LDZY A1300series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
02	4.40	1.30	3.70
03	5.70	2.60	5.00
04	7.00	3.90	6.30
05	8.30	5.20	7.60
06	9.60	6.50	8.90
07	10.90	7.80	10.20
08	12.20	9.10	11.50
09	13.50	10.40	12.80
10	14.80	11.70	14.10
11	16.10	13.00	15.40
12	17.40	14.30	16.70