



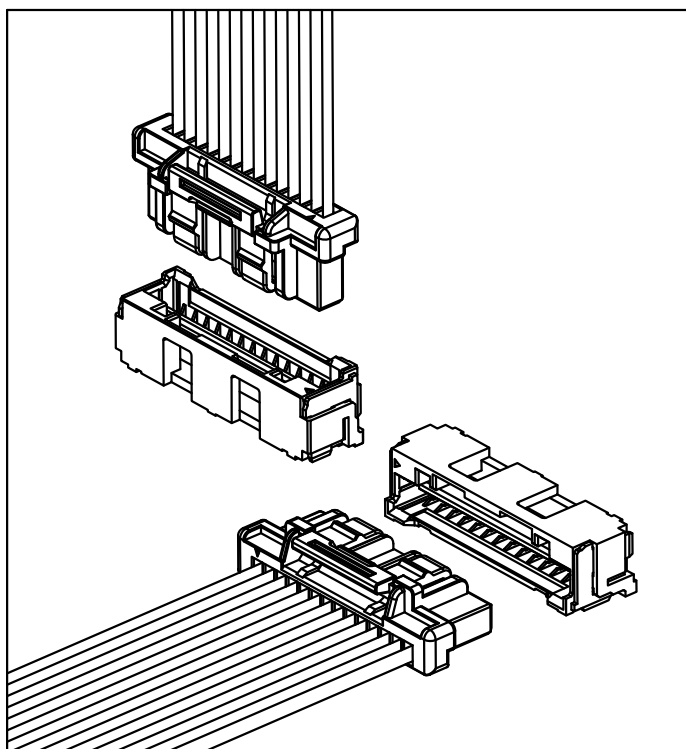

SPECIFICATIONS:




Voltage Rating: 100V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 500V AC/Minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 500MΩ Min.
 Contact Resistance: 20mΩ Max.
 Applicable Wire Range: AWG#24~28.

Assembly Layout:

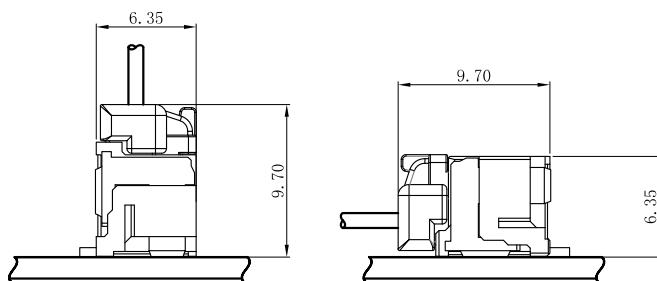


A1502H-NP-PONA

1.50mm Pitch Single Row Housing

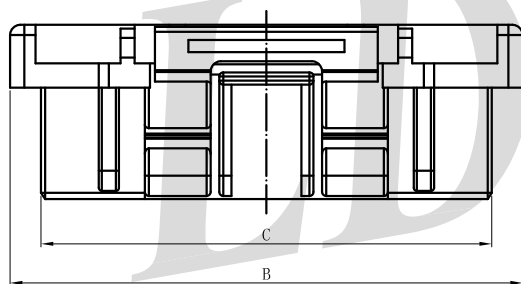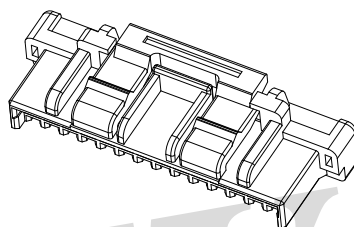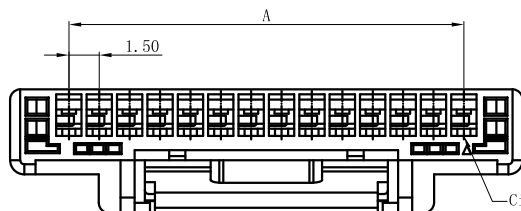

06P-15P Shape Scale 1:1

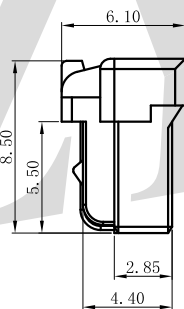

Reference Informations:

*Material:


Housing: PBT UL94V-0/Natrua

*Suitable LDZY A1502 series Terminal


*Mates with LDZY A1502 series Wafer

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
02	1.50	7.30	4.25
03	3.00	8.80	5.75
04	4.50	10.30	7.25
05	6.00	11.80	8.75
06	7.50	13.30	10.25
07	9.00	14.80	11.75
08	10.50	16.30	13.25
09	12.00	17.80	14.75
10	13.50	19.30	16.25
11	15.00	20.80	17.75
12	16.50	22.30	19.25
13	18.00	23.80	20.75
14	19.50	25.30	22.25
15	21.00	26.80	23.75

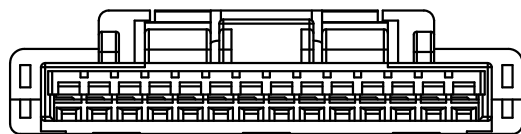

02P-03P Shape
Scale 1:2



04P-05P Shape
Scale 1:2


A1502TF-PXX

1.50mm Pitch Terminal

Reference Informations:

*Material: Phosphor Bronze/Tin-plated or Gold-flash

*Mates with LDZY A1502 series Housing

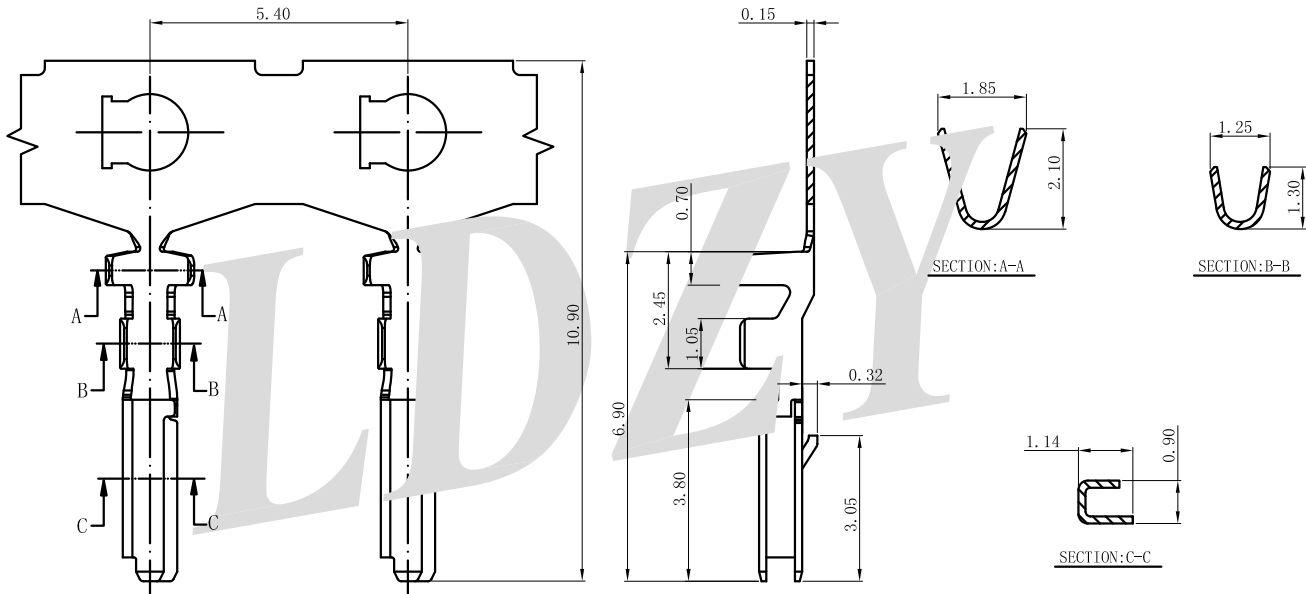

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1502TF-PT1	AWG#24-#28	1.10mm(max)	Phosphor Bronze	Tin-plated	15,000pcs
A1502TF-PG1	AWG#24-#28	1.10mm(max)	Phosphor Bronze	Gold-flash	15,000pcs

A1502WRS-NP-LOBGM 1.50mm Pitch 90° SMT Single Row Wafer

Reference Informations:


*Material:

PIN: Brass/Matte Tin plated

Wafer: LCP,UL94V-0 / Beige

*Suitable LDZY A1502 series Housing


Ordering Information & Dimensions

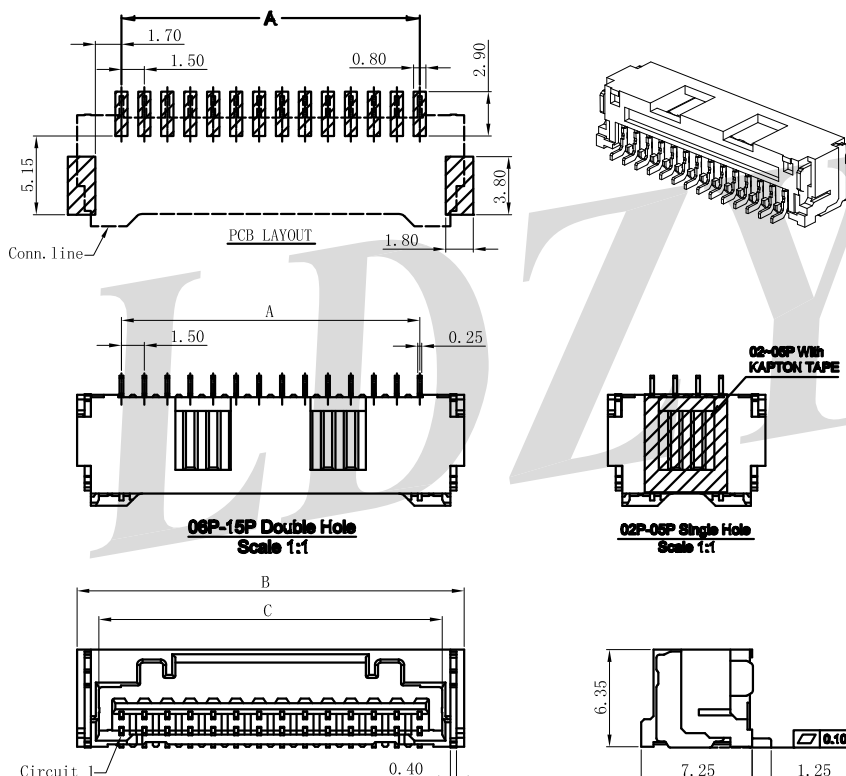

Poles	Dimensions (mm)		
	A	B	C
02	1.50	7.30	4.45
03	3.00	8.80	5.95
04	4.50	10.30	7.45
05	6.00	11.80	8.95
06	7.50	13.30	10.45
07	9.00	14.80	11.95
08	10.50	16.30	13.45
09	12.00	17.80	14.95
10	13.50	19.30	16.45
11	15.00	20.80	17.95
12	16.50	22.30	19.45
13	18.00	23.80	20.95
14	19.50	25.30	22.45
15	21.00	26.80	23.95

A1502WVS-NP-LOBGM

1.50mm Pitch SMT Single Row Wafer

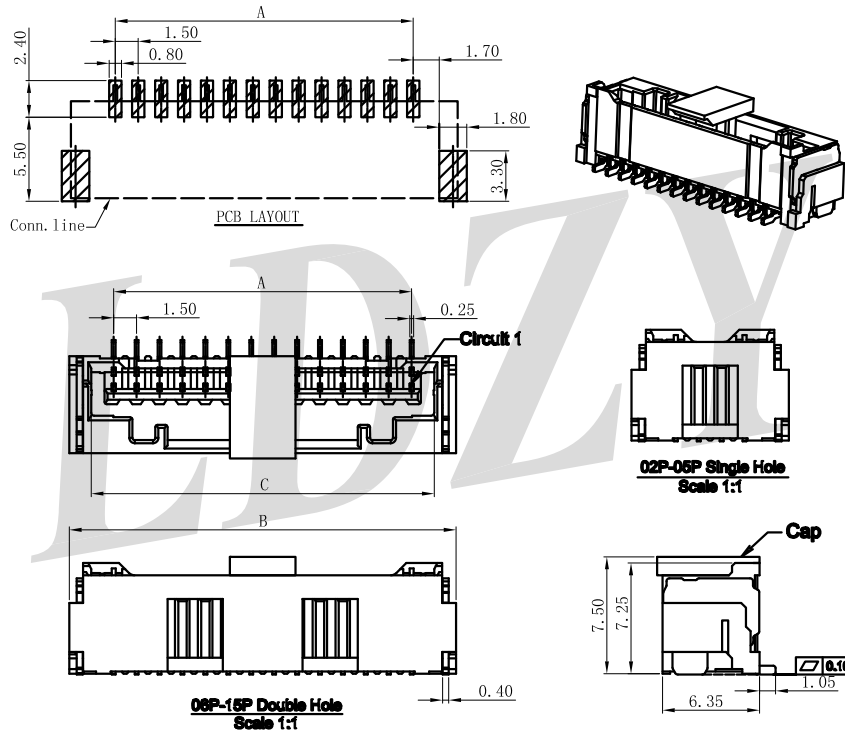

Reference Informations:

*Material:

PIN: Brass/Matte Tin plated

Wafer: LCP,UL94V-0 / Beige

*Suitable LDZY A1502 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
02	1.50	7.30	4.45
03	3.00	8.80	5.95
04	4.50	10.30	7.45
05	6.00	11.80	8.95
06	7.50	13.30	10.45
07	9.00	14.80	11.95
08	10.50	16.30	13.45
09	12.00	17.80	14.95
10	13.50	19.30	16.45
11	15.00	20.80	17.95
12	16.50	22.30	19.45
13	18.00	23.80	20.95
14	19.50	25.30	22.45
15	21.00	26.80	23.95