



SPECIFICATIONS:




Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/Minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Applicable Wire Range: AWG#24~28.

Assembly Layout:



A2006H-NP-N0XX

2.00mm Pitch Single Row Housing

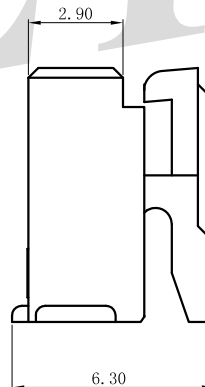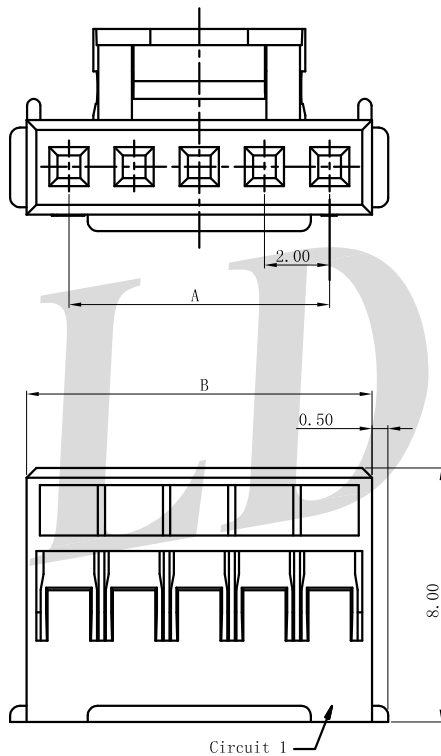

Reference Informations:

*Material:

Housing: PA66 UL94V-0/White or Red

*Suitable LDZY A2006 series Terminal

*Mates with LDZY A2006 series Wafer

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	2.00	4.60
03	4.00	6.60
04	6.00	8.60
05	8.00	10.60
06	10.00	12.60
07	12.00	14.60
08	14.00	16.60
09	16.00	18.60
10	18.00	20.60
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60


A2006TF-PT1

2.00mm Pitch Terminal

Reference Informations:

*Material: Phosphor Bronze/Tin-plated

*Mates with LDZY A2006 series Housing

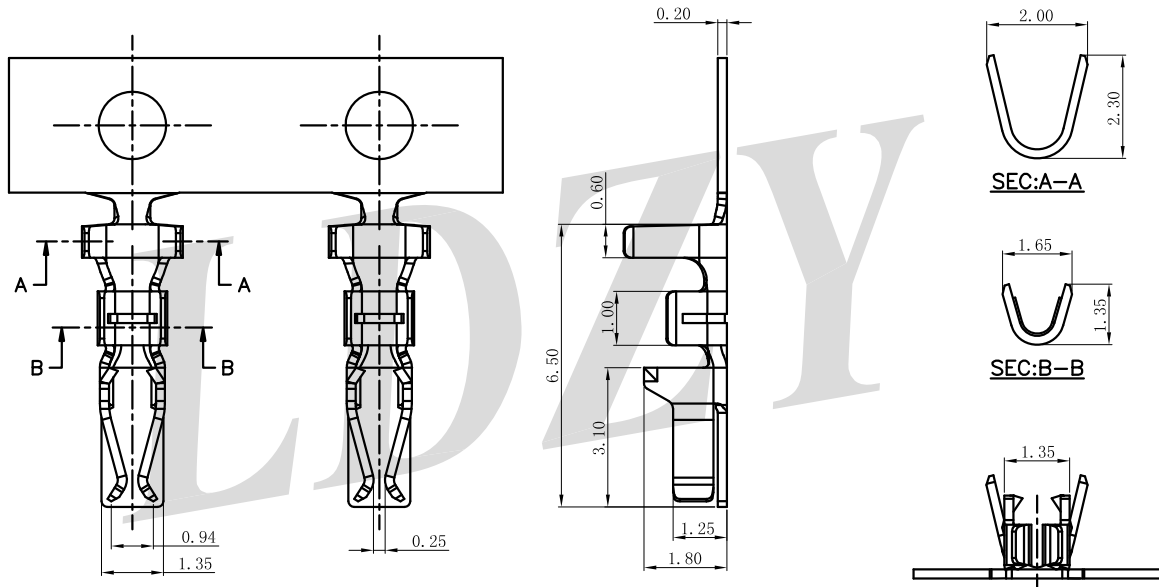

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2006TF-PT1	AWG#22-#30	1.45mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

A2006WV-NP-N0XXT

2.00mm Pitch 180° Single Row Wafer

Reference Informations:


*Material:

PIN: Brass/Tin-plated

Wafer: PA66,UL94V-0 / White or Red

*Suitable LDZY A2006 series Housing


Ordering Information & Dimensions

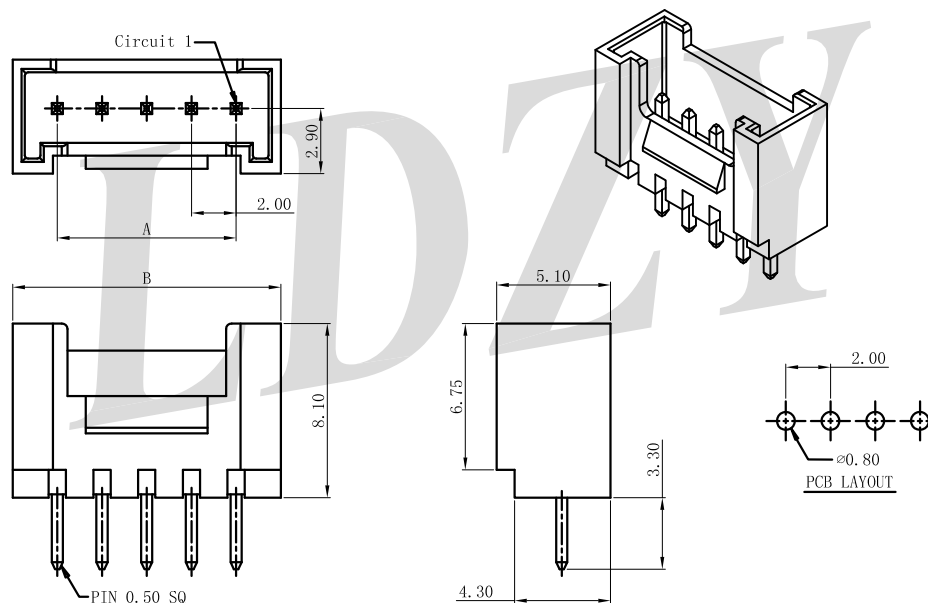

Poles	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

A2006WR-NP-N0WTT

2.00mm Pitch 90° Single Row Wafer

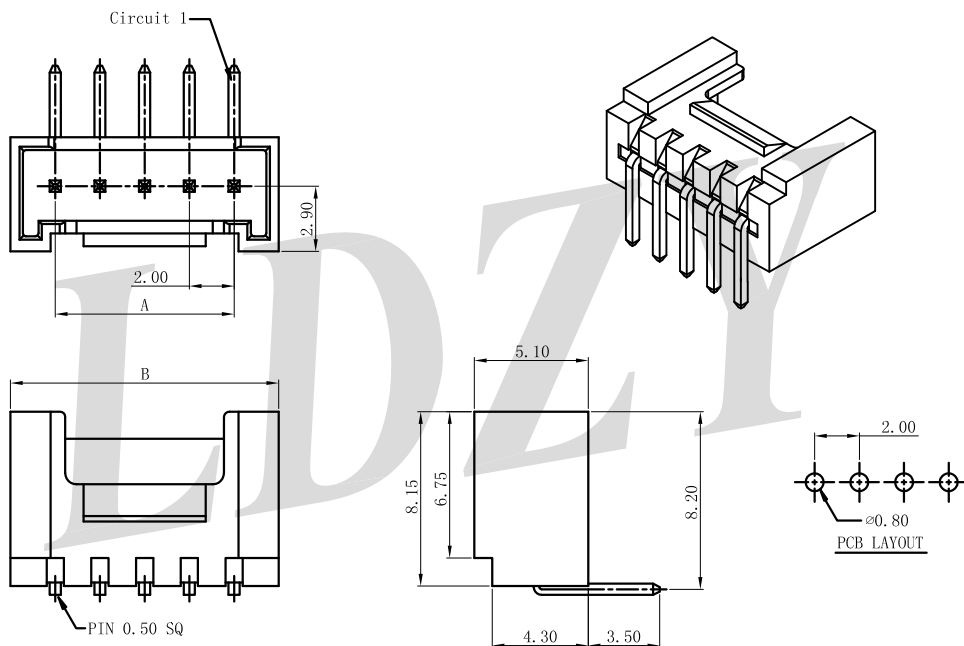

Reference Informations:

*Material:

PIN: Brass/Tin-plated

Wafer: PA66,UL94V-0 / White

*Suitable LDZY A2002 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00