



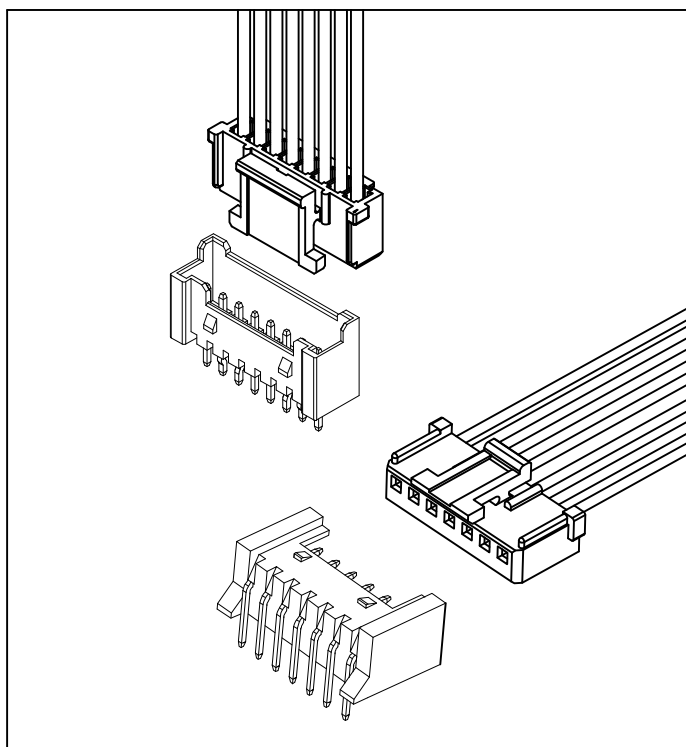

SPECIFICATIONS:

Voltage Rating: 125V AC/DC
Current Rating: 2A AC/DC
Withstanding Voltage: 800V AC/Minute
Temperature Range: -40°C~+105°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Applicable Wire Range: AWG#24~30.

Assembly Layout:

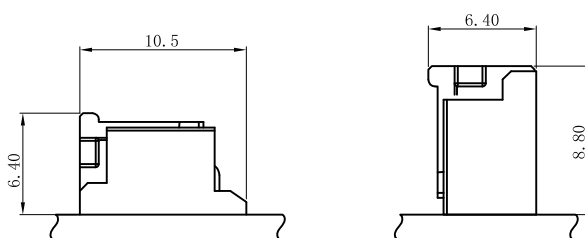

A2008H-NP-N0WT

2.00mm Pitch Single Row Housing

Reference Informations:

*Material:


Housing: PA66 UL94V-0/White

*Suitable LDZY A2008 series Terminal

*Mates with LDZY A2008 series Wafer

Ordering Information & Dimensions

Poles	Dimensions (mm)					
	A	B	C	D	E	F
02	2.00	5.10	7.17			
03	4.00	7.10	9.17			
04	6.00	9.10	10.30	4.50	7.80	7.80
05	8.00	11.10	12.30	4.50	7.80	7.80
06	10.00	13.10	14.30	4.50	7.80	7.80
07	12.00	15.10	16.30	4.50	7.80	7.80
08	14.00	17.10	18.30	4.50	7.80	7.80
09	16.00	19.10	20.30	4.50	7.80	7.80
10	18.00	21.10	22.30	11.00	14.30	14.30
11	20.00	23.10	24.30	11.00	14.30	14.30
12	22.00	25.10	26.30	11.00	14.30	14.30
13	24.00	27.10	28.30	11.00	14.30	14.30
14	26.00	29.10	30.30	11.00	14.30	14.30
15	28.00	31.10	32.30	11.00	14.30	14.30
16	30.00	33.10	34.30	11.00	14.30	14.30
17	32.00	35.10	36.30	11.00	14.30	14.30
18	34.00	37.10	38.30	11.00	14.30	14.30
19	36.00	39.10	40.30	11.00	14.30	14.30
20	38.00	41.10	42.30	11.00	14.30	14.30

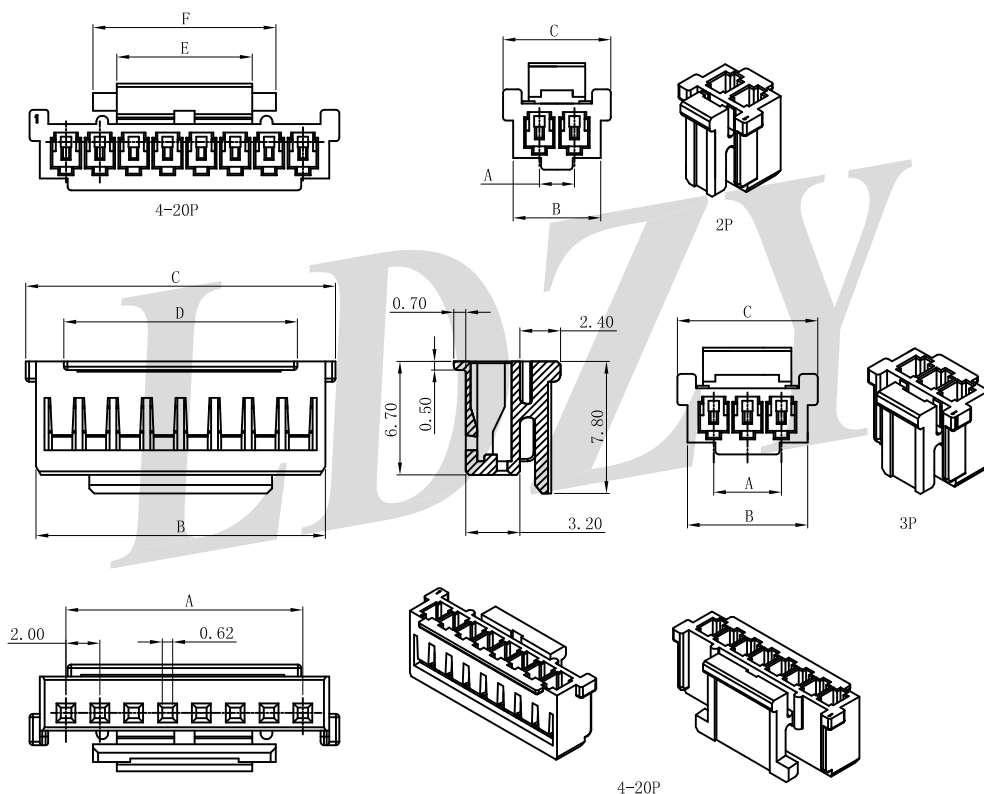


A2008TF-PT1

2.00mm Pitch Terminal

Reference Informations:

*Material: Phosphor Bronze/Tin-plated

*Mates with LDZY A2008 series Housing

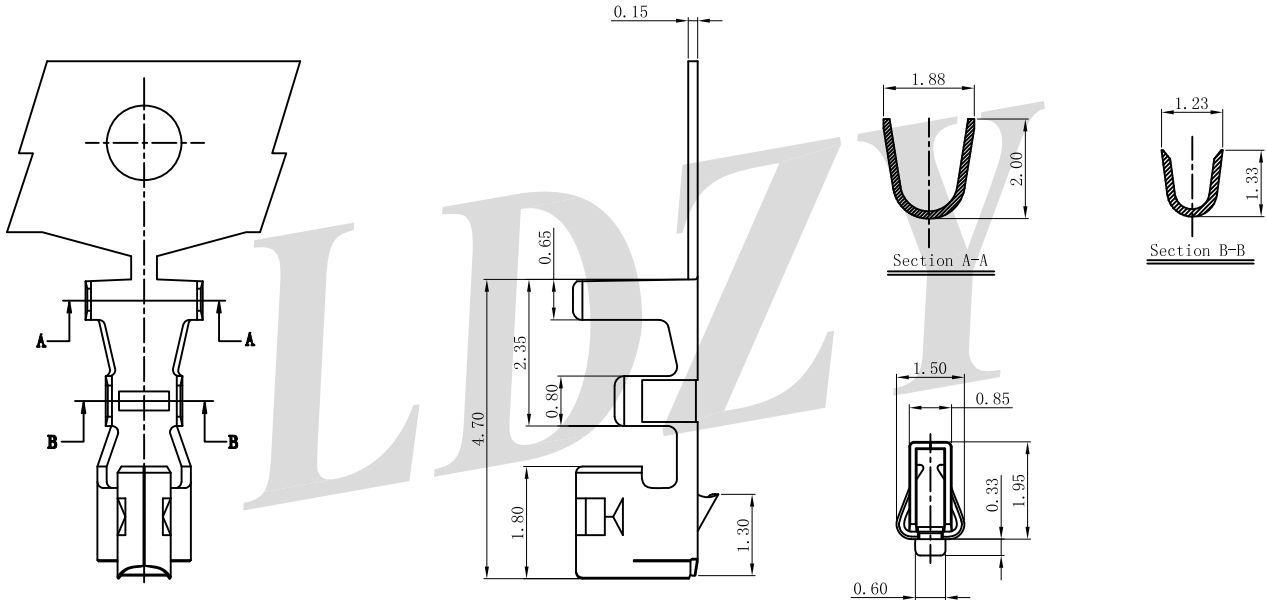

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2008TF-PT1	AWG#24-#30	1.50mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

A2008WR-NP-N0NAT

2.00mm Pitch 90° Single Row Wafer

Reference Informations:


*Material:

PIN: Brass/Tin-plated

Wafer: PA66,UL94V-0 / Natrual

*Suitable LDZY A2008 series Housing


Ordering Information & Dimensions

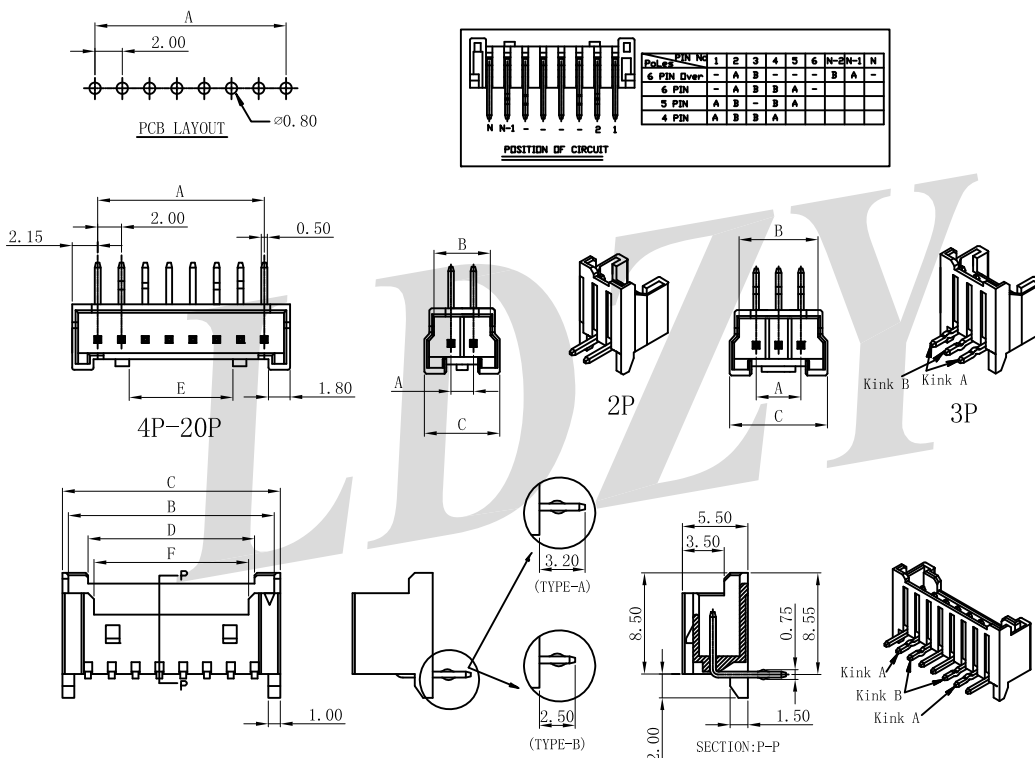

Poles	Dimensions (mm)				
	A	B	C	D	E
02	2.00	5.30	6.00	2.00	
03	4.00	7.30	8.00	3.30	
04	6.00	9.30	10.00	4.50	
05	8.00	11.30	12.00	4.50	7.80
06	10.00	13.30	14.00	4.50	7.80
07	12.00	15.30	16.00	4.50	7.80
08	14.00	17.30	18.00	4.50	7.80
09	16.00	19.30	20.00	19.80	7.80
10	18.00	21.30	22.00	11.00	14.30
11	20.00	23.30	24.00	11.00	14.30
12	22.00	25.30	26.00	11.00	14.30
13	24.00	27.30	28.00	11.00	14.30
14	26.00	29.30	30.00	11.00	14.30
15	28.00	31.30	32.00	11.00	14.30
16	30.00	33.30	34.00	11.00	14.30
17	32.00	35.30	36.00	11.00	14.30
18	34.00	37.30	38.00	11.00	14.30
19	36.00	39.30	40.00	11.00	14.30
20	38.00	41.30	42.00	11.00	14.30

A2008WV-NP-N0NAT

2.00mm Pitch 90° Single Row Wafer



Poles	PIN No	1	2	3	4	5	6	N-2	N-1	N
6 PIN Over		-	A	B	-	-	-	B	A	
6 PIN		-	A	B	B	A	-			
5 PIN		A	B	-	B	A				
4 PIN		A	B	B	A					









Reference Informations:

*Material:

PIN: Brass/Tin-plated

Wafer: PA66,UL94V-0 / Natrual

*Suitable LDZY A2008 series Housing
Ordering Information & Dimensions

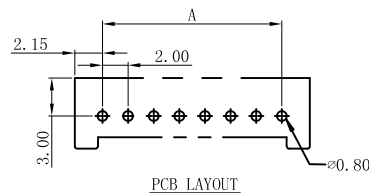

Poles	Dimensions (mm)					
	A	B	C	D	E	F
02	2.00	5.30	7.70			
03	4.00	7.30	9.70			
04	6.00	9.30	10.30	6.00	4.25	6.70
05	8.00	11.30	12.30	8.00	4.25	7.00
06	10.00	13.30	14.30	10.00	4.25	7.00
07	12.00	15.30	16.30	12.00	4.25	7.00
08	14.00	17.30	18.30	14.00	8.25	11.00
09	16.00	19.30	20.30	16.00	8.25	11.00
10	18.00	21.30	22.30	18.00	8.25	11.00
11	20.00	23.30	24.30	20.00	8.25	11.00
12	22.00	25.30	26.30	22.00	8.25	11.00
13	24.00	27.30	28.30	24.00	8.25	11.00
14	26.00	29.30	30.30	26.00	8.25	11.00
15	28.00	31.30	32.30	28.00	8.25	11.00
16	30.00	33.30	34.30	30.00	8.25	11.00
17	32.00	35.30	36.30	32.00	8.25	11.00
18	34.00	37.30	38.30	34.00	8.25	11.00
19	36.00	39.30	40.30	36.00	8.25	11.00
20	38.00	41.30	42.30	38.00	8.25	11.00