


SPECIFICATIONS:



Voltage Rating: 250V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 1000V AC/Minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Applicable Wire Range: AWG#26~30.

Assembly Layout:

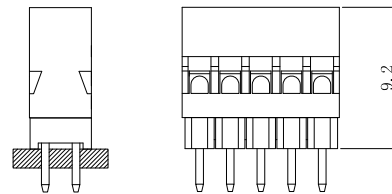

A2016HA-2NP-N2BK

2.00mm Pitch Dual Row Housing

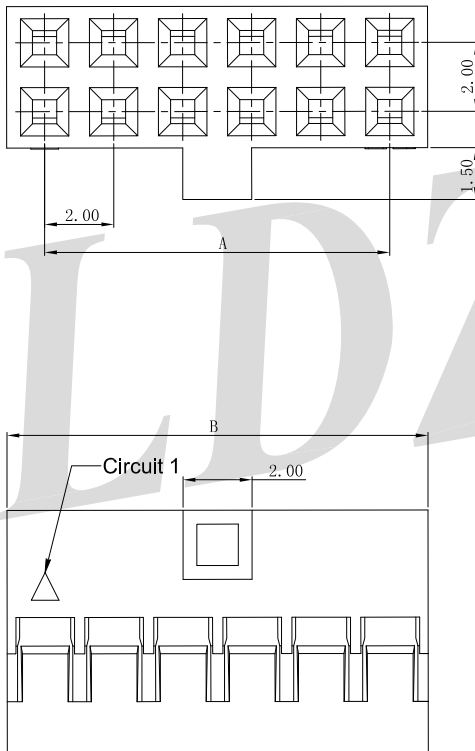

Reference Informations:

*Material:

Housing: PA66 UL94V-2/Black

*Suitable LDZY A2015 series Terminal

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2*4	6.00	8.40
2*5	8.00	10.40
2*6	10.00	12.40
2*7	12.00	14.40
2*8	14.00	16.40
2*9	16.00	18.40
2*10	18.00	20.40
2*11	20.00	22.40
2*12	22.00	24.40
2*13	24.00	26.40
2*14	26.00	28.40
2*15	28.00	30.40
2*16	30.00	32.40
2*17	32.00	34.40
2*18	34.00	36.40
2*19	36.00	38.40
2*20	38.00	40.40
2*21	40.00	42.40
2*22	42.00	44.40

A2016H-2NP-N2BK

2.00mm Pitch Dual Row Housing


Reference Informations:

*Material:

Housing: PA66 UL94V-2/Black

*Suitable LDZY A2016 series Terminal
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2*2	2.00	4.30
2*3	4.00	6.30
2*4	6.00	8.30
2*5	8.00	10.30
2*6	10.00	12.30
2*7	12.00	14.30
2*8	14.00	16.30
2*9	16.00	18.30
2*10	18.00	20.30
2*11	20.00	22.30
2*12	22.00	24.30
2*13	24.00	26.30
2*14	26.00	28.30
2*15	28.00	30.30
2*16	30.00	32.30
2*17	32.00	34.30
2*18	34.00	36.30
2*19	36.00	38.30
2*20	38.00	40.30
2*21	40.00	42.30
2*22	42.00	44.30

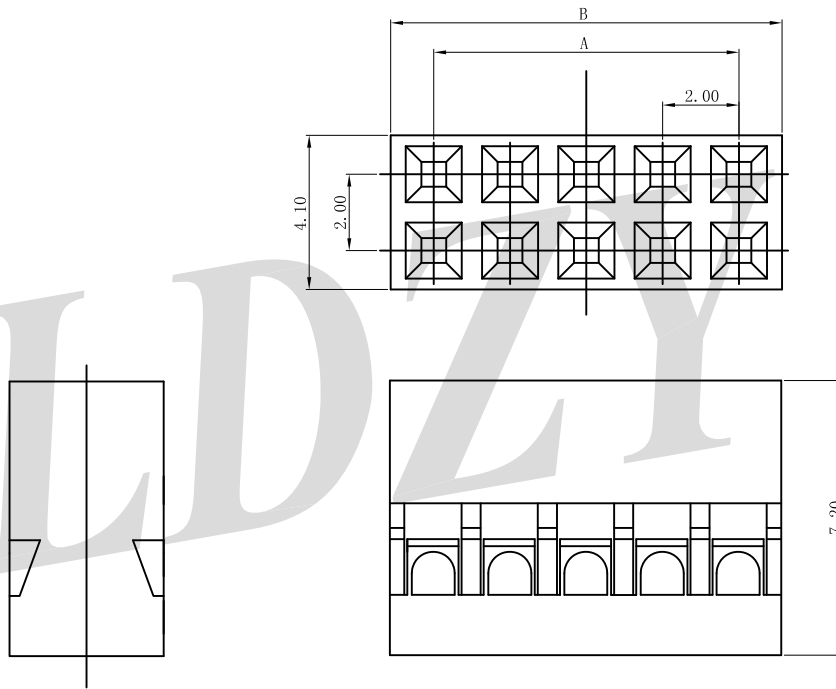


A2016TF-PT1

2.00mm Pitch Terminal

Reference Informations:

*Material: Phosphor Bronze/Tin-plated

*Mates with LDZY A2016 series Housing

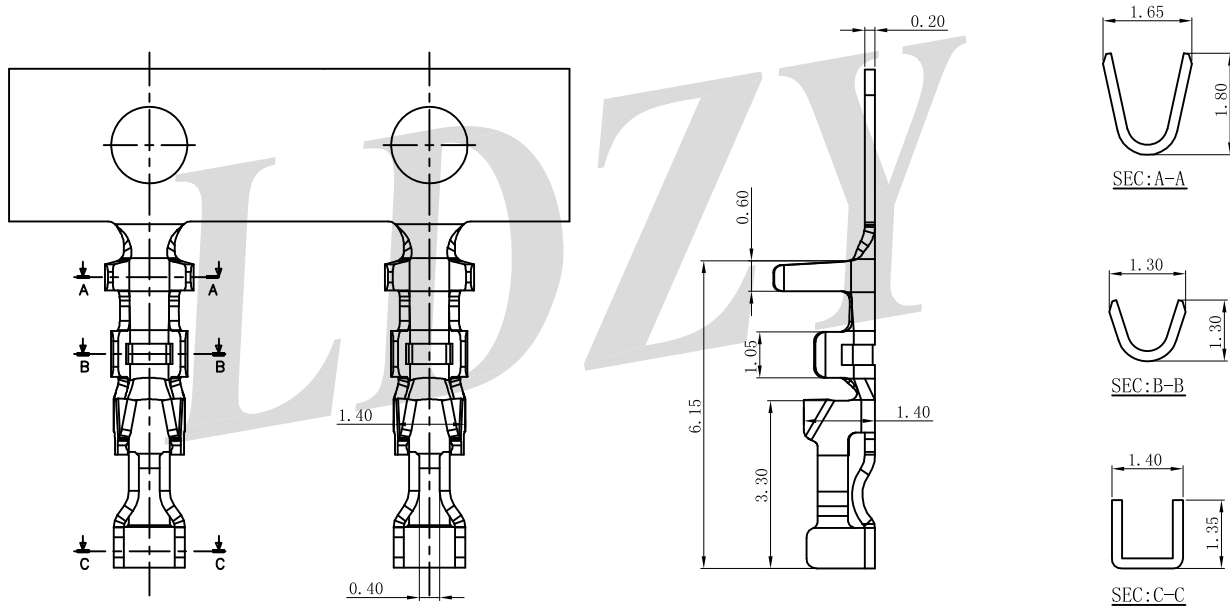

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2016TF-PT1	AWG#26-#32	1.50mm(max)	Phosphor Bronze	Tin-plated	10,000pcs