


SPECIFICATIONS:


Voltage Rating: 300V AC/DC
Current Rating: 3A AC/DC
Withstanding Voltage: 1000V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 100MΩ Min.
Contact Resistance: 20mΩ Max.
Applicable Wire Range: AWG#24~28.

Assembly Layout:

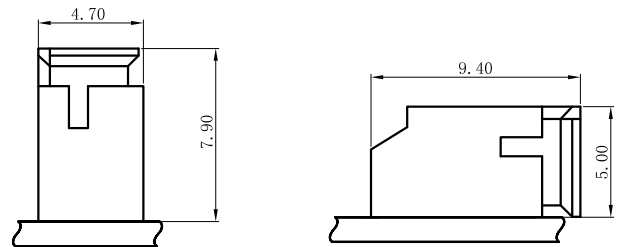

A2100H-2NP-N0BN

2.00mm Pitch Dual Row Housing

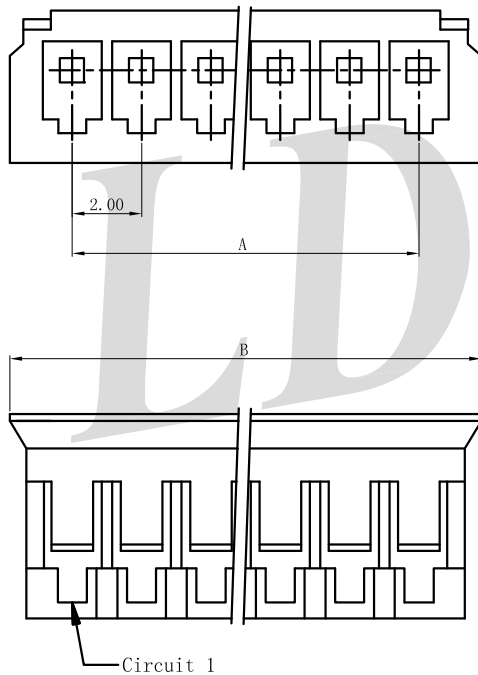

Reference Informations:

*Material:


Housing: PA66 UL94V-0/Brown

*Suitable LDZY A2100 series Terminal

*Mates with LDZY A2100 series Wafer

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	2.00	5.60
03	4.00	7.60
04	6.00	9.60
05	8.00	11.60
06	10.00	13.60
07	12.00	15.60
08	14.00	17.60
09	16.00	19.60
10	18.00	21.60
11	20.00	23.60
12	22.00	25.60
13	24.00	27.60
14	26.00	29.60
15	28.00	31.60




A2100TF-PT1

2.00mm Pitch Terminal

Reference Informations:

*Material: Phosphor Bronze/Tin-plated

*Mates with LDZY A2100 series Housing

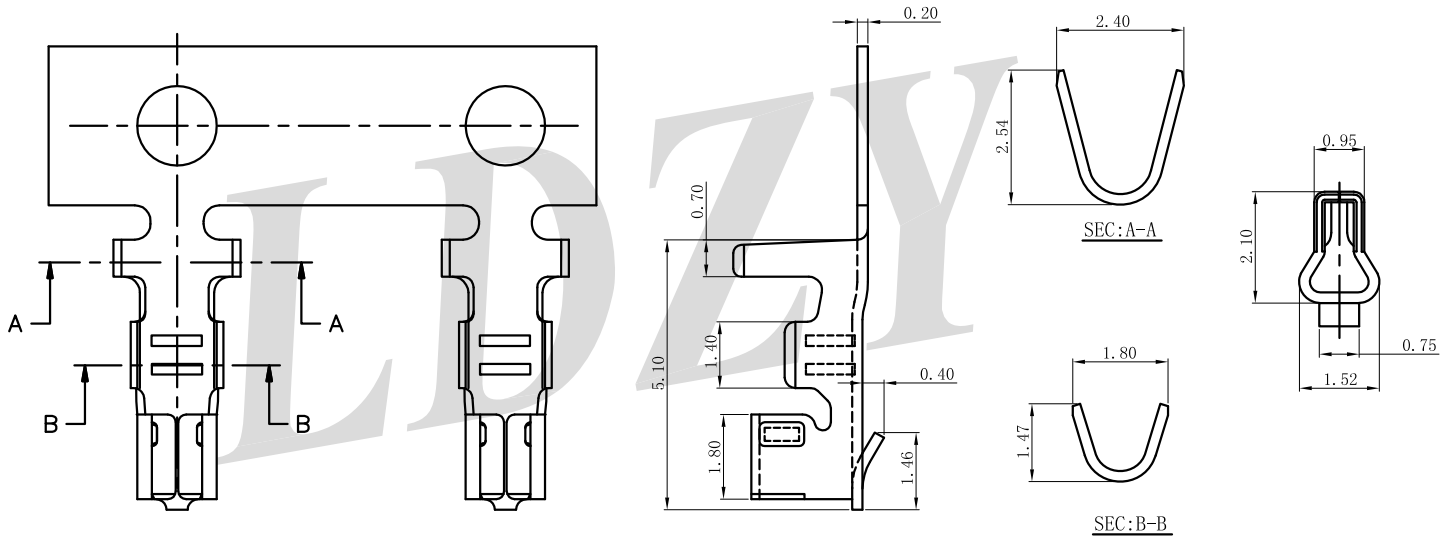

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2100TF-PT1	AWG#24-#28	1.50mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

A2100WV-2NP-N0BNT

2.00mm Pitch 180° Dual Row Wafer

Reference Informations:


*Material:

PIN: Brass/Tin-plated

Wafer: PA66,UL94V-0 / Brown

*Suitable LDZY A2100 series Housing

Ordering Information & Dimensions

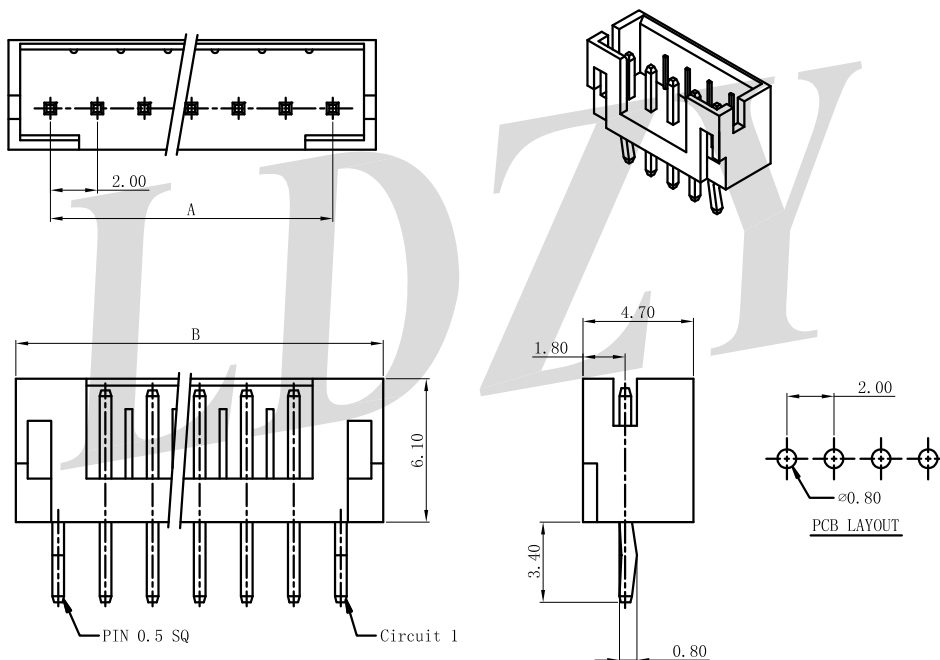

Poles	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

A2100WR-2NP-N0BNT

2.00mm Pitch 90° Dual Row Wafer

Reference Informations:

*Material:

PIN: Brass/Tin-plated

Wafer: PA66,UL94V-0 / Brown

*Suitable LDZY A2100 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

