


SPECIFICATIONS:


Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/Minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 10mΩ Max.
 Applicable Wire Range: AWG#22~28.

Assembly Layout:

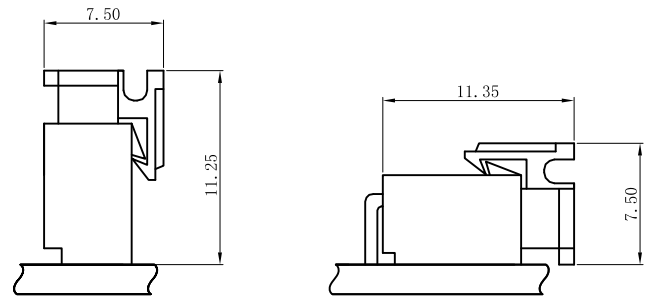

A2515HB-NP-N0WH

2.50mm Pitch Single Row Housing

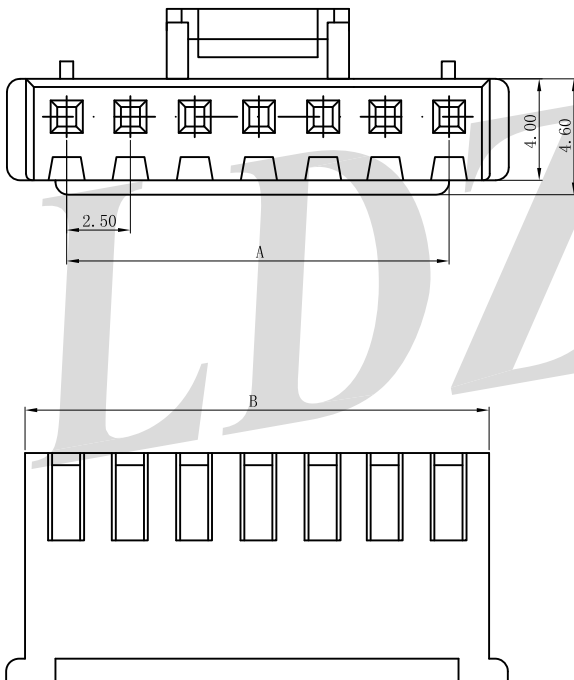

Reference Informations:

*Material:


Housing: PA66 UL94V-0/White

*Suitable LDZY A2515 series Terminal

*Mates with LDZY A2515 series Wafer

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	2.50	5.70
03	5.00	8.20
04	7.50	10.70
05	10.00	13.20
06	12.50	15.70
07	15.00	18.20
08	17.50	20.70
09	20.00	23.20
10	22.50	25.70
11	25.00	28.20
12	27.50	30.70
13	30.00	33.20
14	32.50	35.70
15	35.00	38.20



A2515 Series 2.50mm Pitch Series Wire to Board Connectors


A2515TF-PT1

2.50mm Pitch Terminal

Reference Informations:

*Material: Phosphor Bronze/Tin-plated

*Mates with LDZY A2515 series Housing

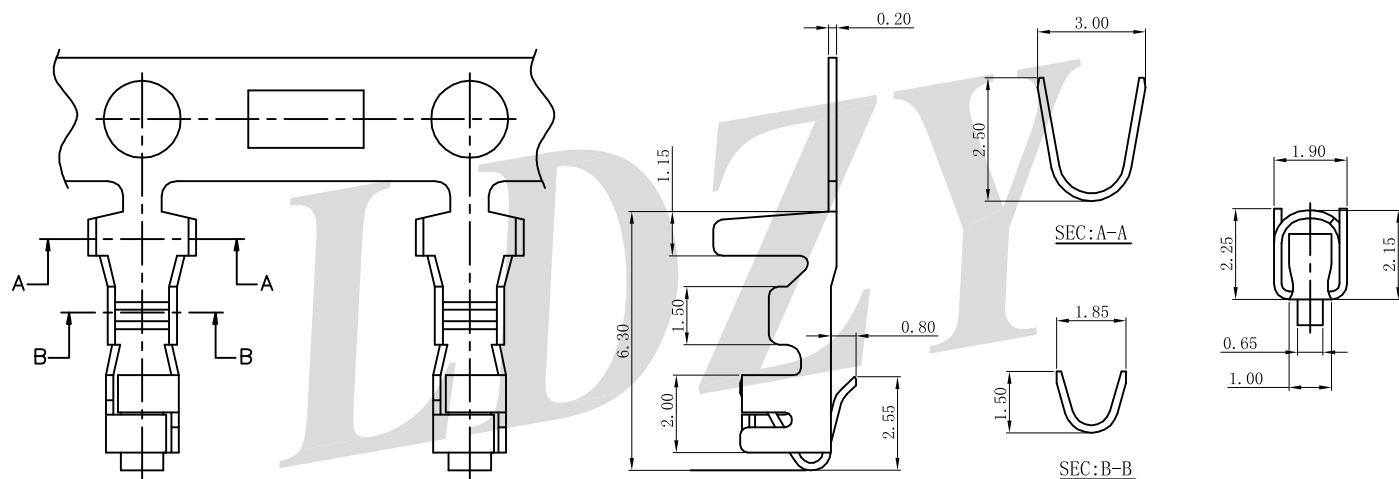


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2501TF-PT1	AWG#22-#28	1.9mm(max)	Phosphor Bronze	Tin-plated	6,000pcs

A2515WVB-NP-N0NAT

2.50mm Pitch 180° Single Row Wafer

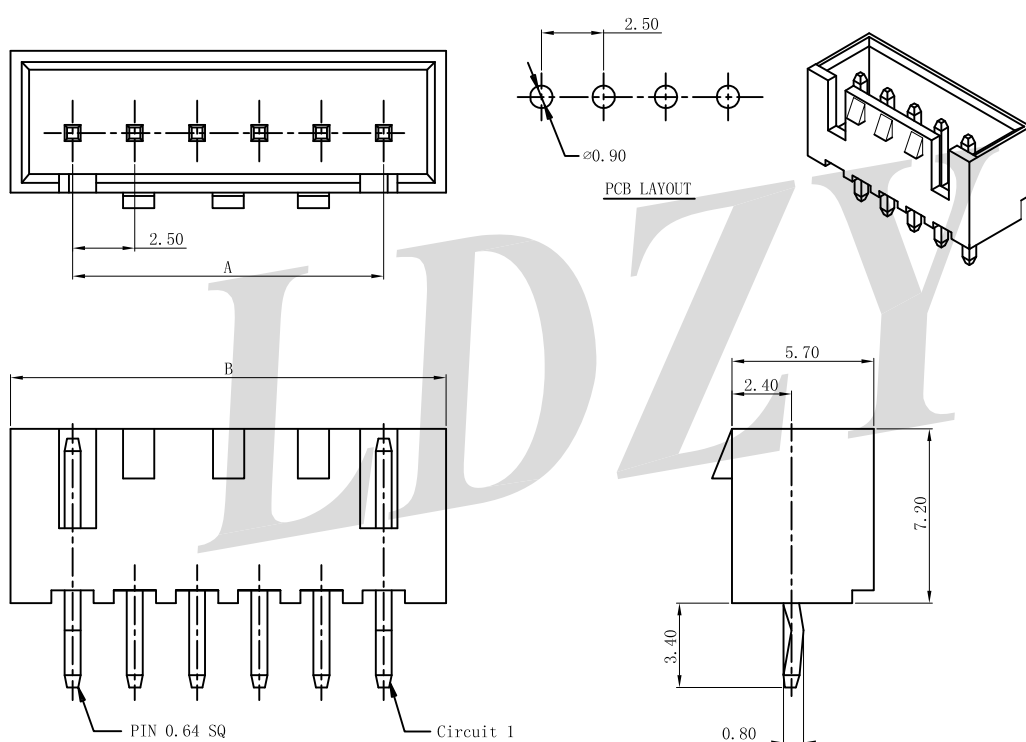

Reference Informations:

*Material:

PIN: Brass/Tin-plated


Wafer: PA66,UL94V-0 / Natrual

***Suitable LDZY A2515 series Housing**
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50

A2515WRB-NP-N0NAT

2.50mm Pitch 90° Single Row Wafer

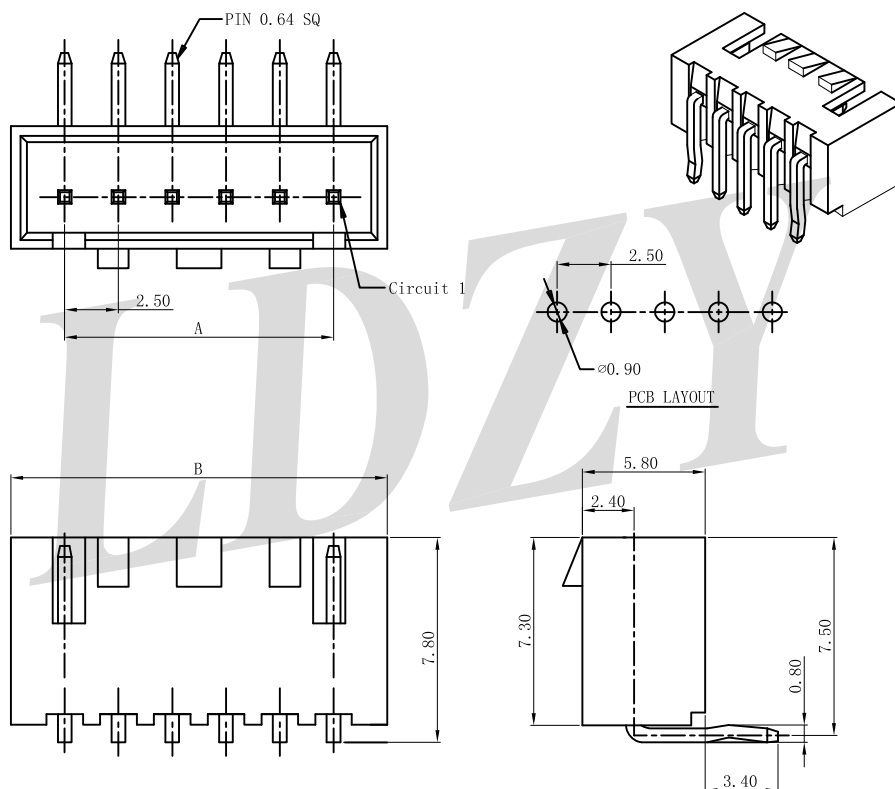

Reference Informations:

*Material:

PIN: Brass/Tin-plated

Wafer: PA66,UL94V-0 / Natrual

*Suitable LDZY A2515 series Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50