



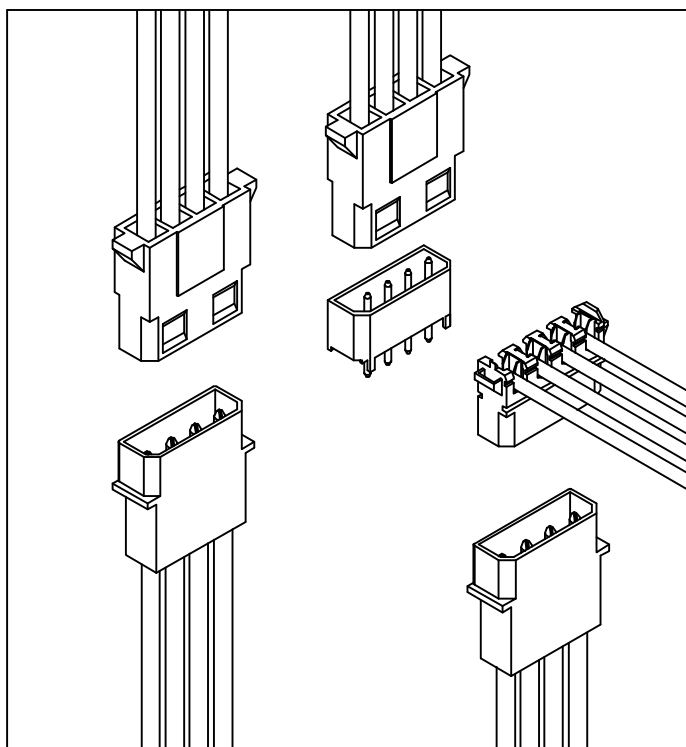

SPECIFICATIONS:




Voltage Rating: 250V AC/DC
Current Rating: 10A AC/DC
Withstanding Voltage: 1500V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 10mΩ Max.
Applicable Wire Range: AWG#18~24.

Assembly Layout:

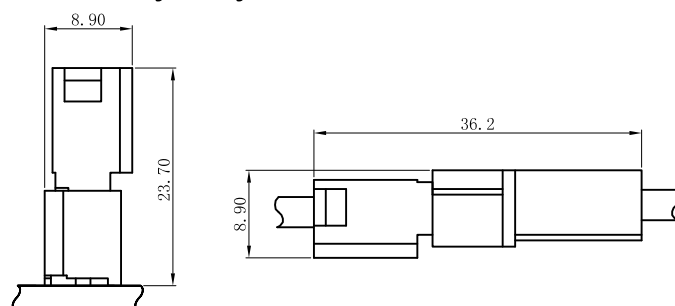

C5080HF-04-N2XX

5.08mm Pitch Single Row Housing

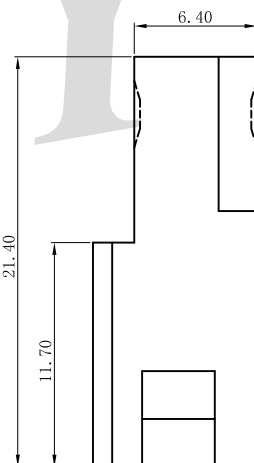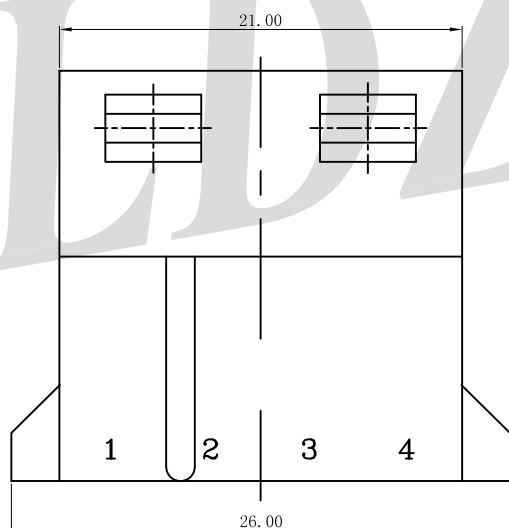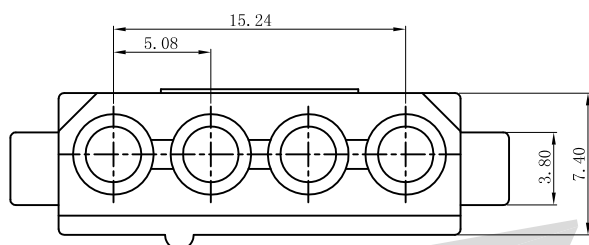

Reference Informations:

*Material:


Housing: PA66 UL94V-2/Natrual or White

*Suitable LDZY C5080 series Terminal

*Mates with LDZY C5080 series Wafer

C5030HM-04-N2XX

5.08mm Pitch Single Row Housing

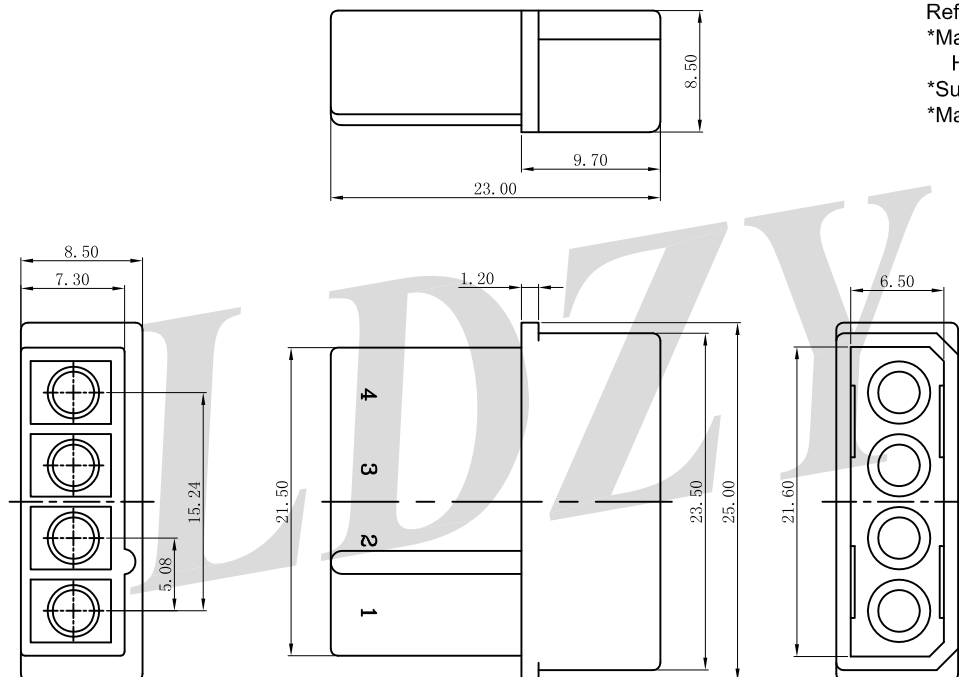

Reference Informations:

*Material:


Housing: PA66 UL94V-2/Natrual or White

*Suitable LDZY C5080 series Terminal

*Mates with LDZY C5080 Female Housing

C5030HI-04-N2XXT

5.08mm Pitch Single Row Housing

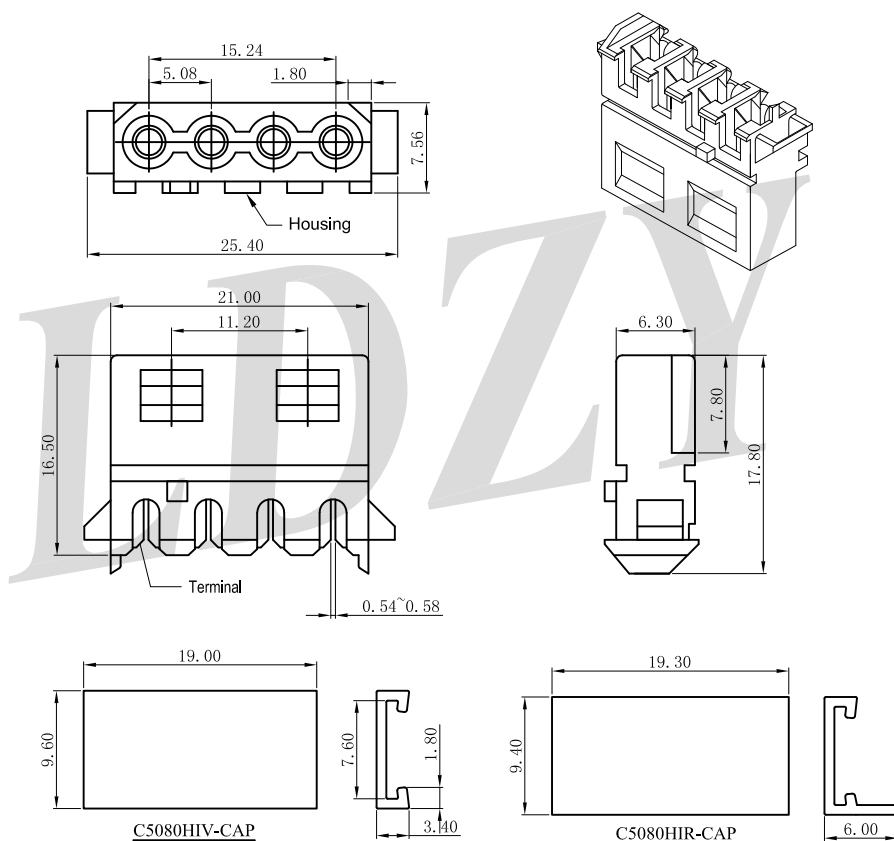

Reference Informations:

*Material:


Housing: PA66 UL94V-2/Natrual or White

PIN: Brass/Tin-plated

C5080 Series 5.08mm Pitch Series Wire to Wire Connectors

C5080TF-XT1


5.08mm Pitch Terminal

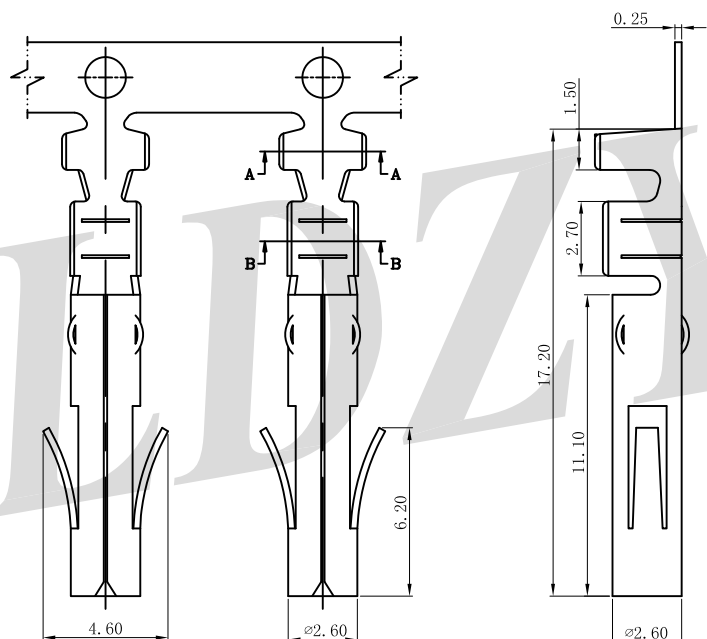


Reference Informations:

*Material: Phosphor Bronze/Tin-plated
Brass/ Tin-plated

*Mates with LDZY C5080 series Housing



SEC:A-A




SEC:B-B

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C5030TF-PT1	AWG#18-#24	3.00mm(max)	Phosphor Bronze	Tin-plated	8,000pcs
C5030TF-BT1	AWG#18-#24	3.00mm(max)	Brass	Tin-plated	8,000pcs

C5080TM-XT1


5.08mm Pitch Terminal

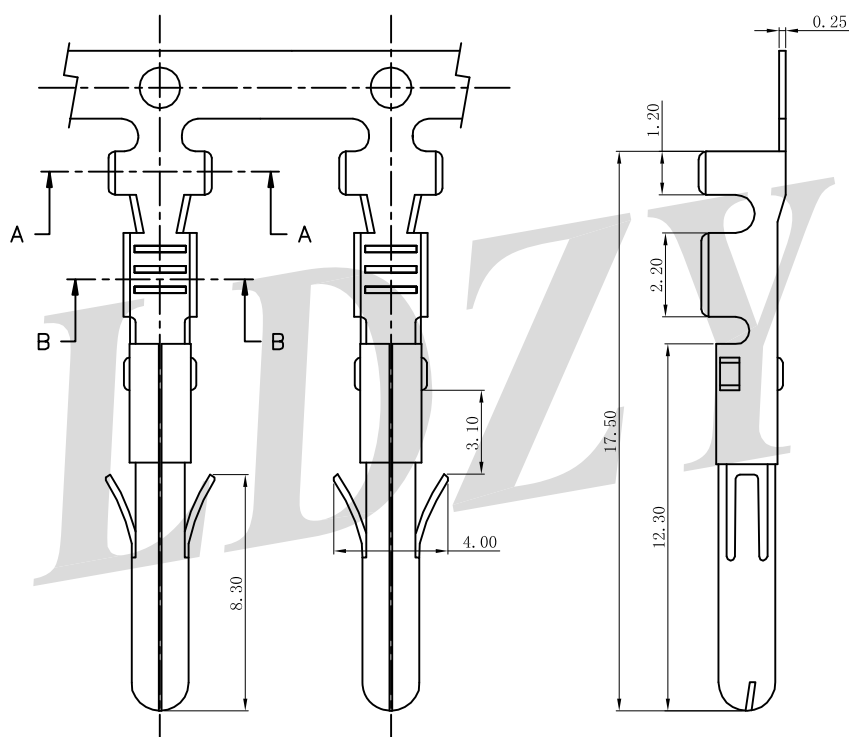


Reference Informations:

*Material: Phosphor Bronze/Tin-plated
Brass/ Tin-plated

*Mates with LDZY C5080 series Housing



SEC:A-A





SEC:B-B

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C5030TM-PT1	AWG#18-#24	3.00mm(max)	Phosphor Bronze	Tin-plated	8,000pcs
C5030TM-BT1	AWG#18-#24	3.00mm(max)	Brass	Tin-plated	8,000pcs

C5080WRAK-04-6TBKT

5.08mm Pitch 90° Single Row Wafer

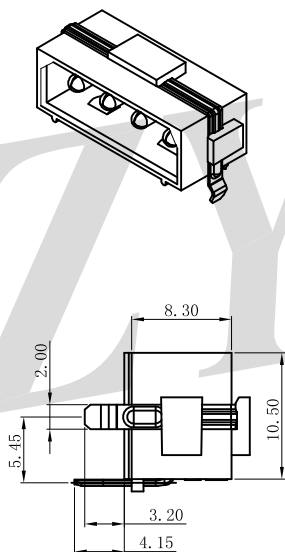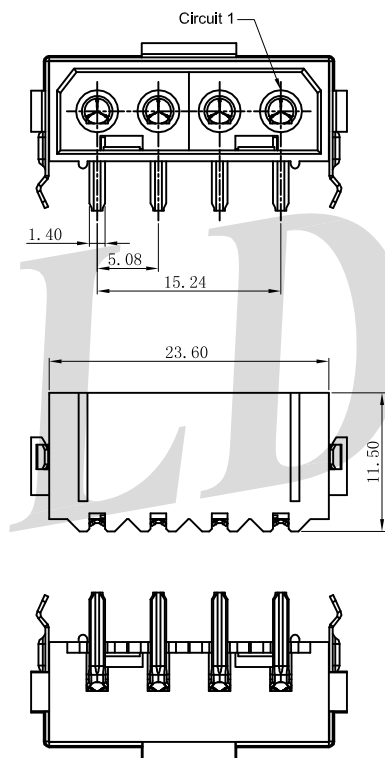


Reference Informations:

*Material:

PIN: Brass/Tin-plated



Wafer: PA6T UL94V-0/ Black

*Suitable LDZY C5080 series Housing

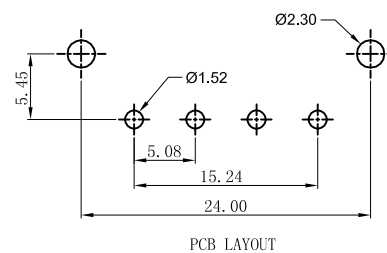

C5080WRBK-04-9TBKT

5.08mm Pitch 90° Single Row Wafer

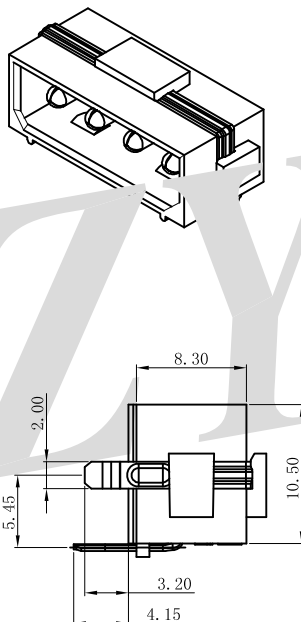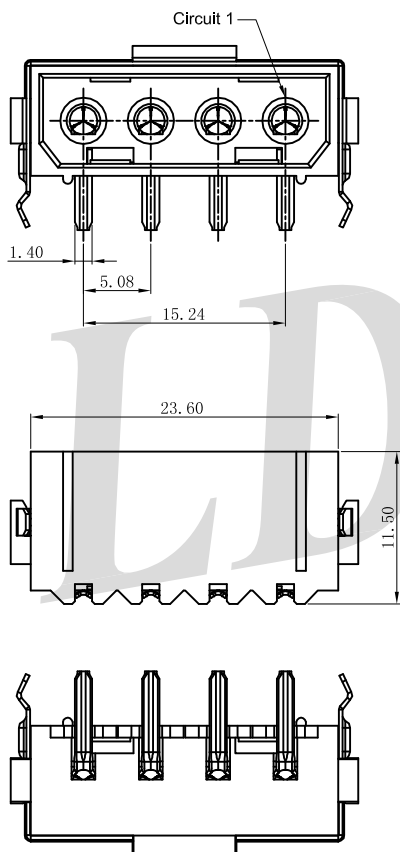


Reference Informations:

*Material:

PIN: Brass/Tin-plated


Wafer: PA9T UL94V-0/ Black

*Suitable LDZY C5080 series Housing

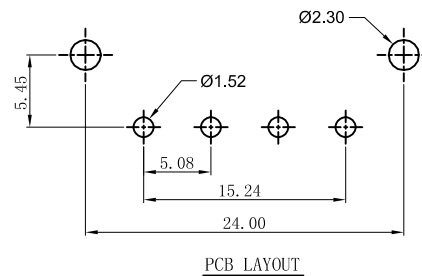

C5080WRFK-04-N2BKT

5.08mm Pitch 90° Single Row Wafer

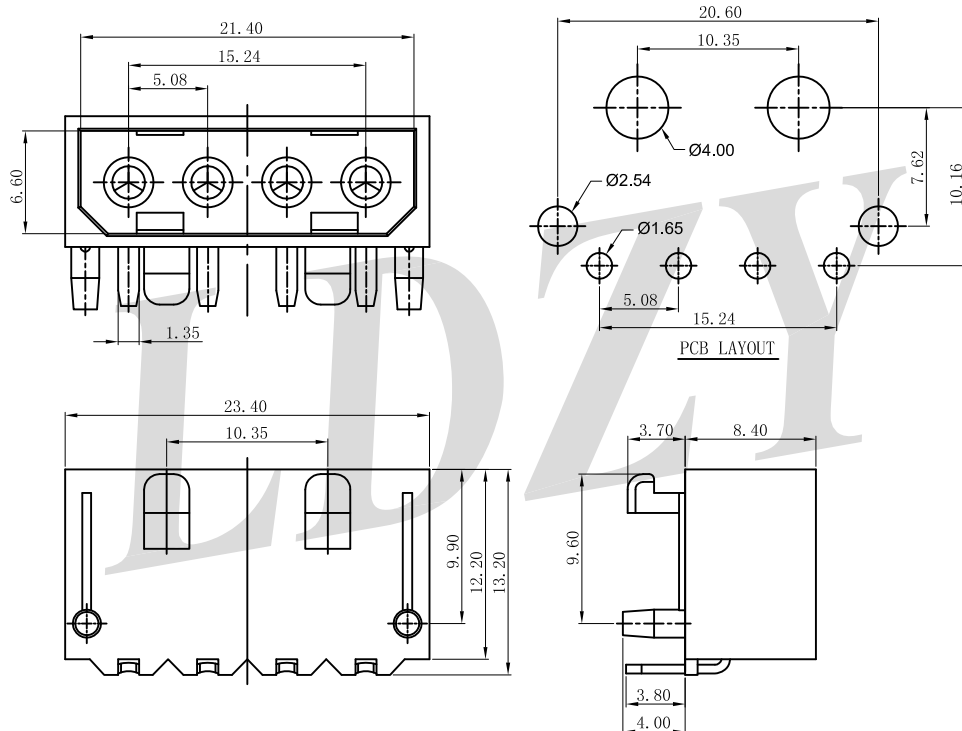

Reference Informations:

*Material:


PIN: Brass/Tin-plated

Wafer: PA66 UL94V-2/ Black

*Suitable LDZY C5080 series Housing

C5080WVA-04-N2NAT

5.08mm Pitch 180° Single Row Wafer

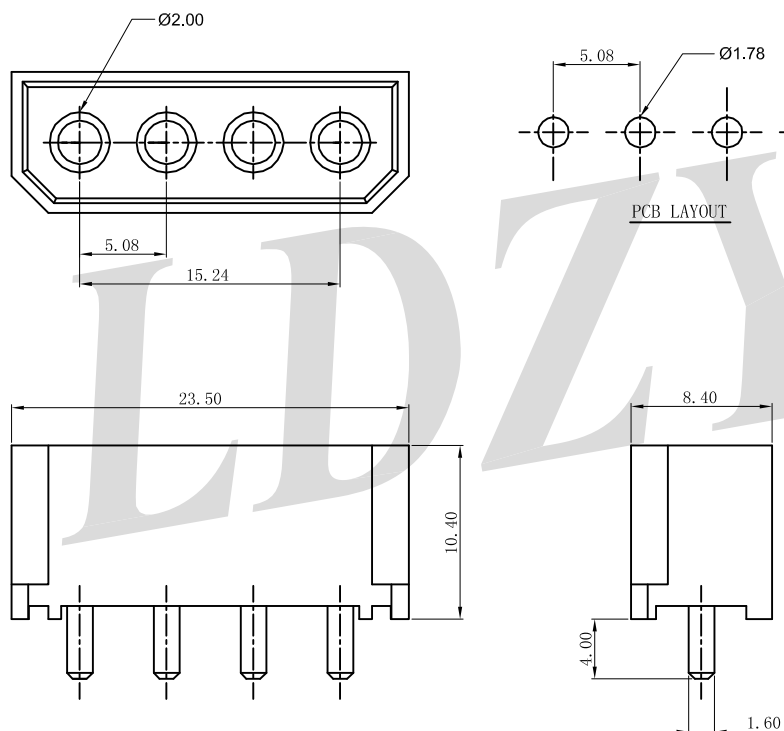


Reference Informations:

*Material:

PIN: Brass/Tin-plated


Wafer: PA66 UL94V-2/ Natural

*Suitable LDZY C5080 series Housing



C5080WVF-04-N2NAT

5.08mm Pitch 180° Single Row Wafer

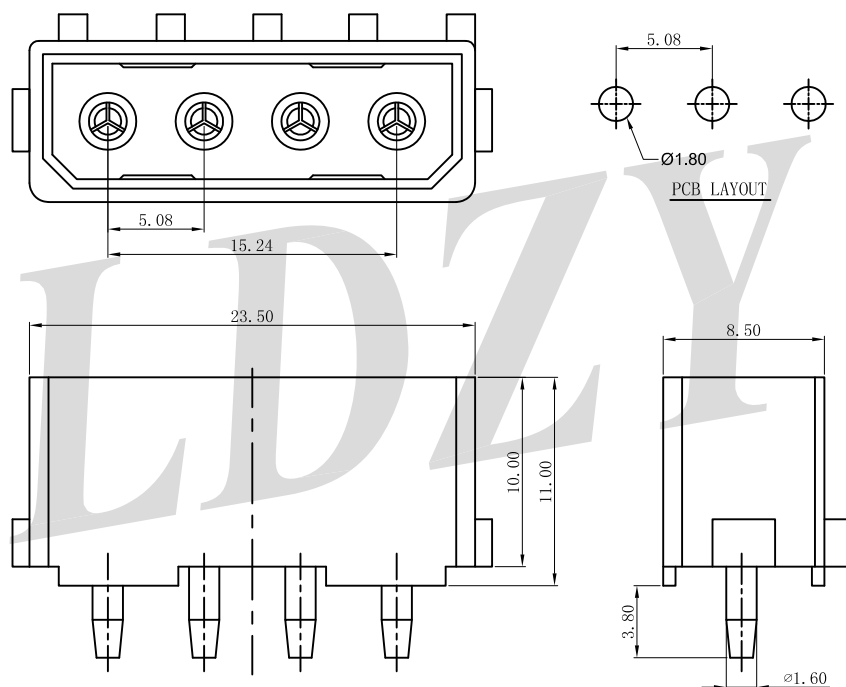

Reference Informations:

*Material:


PIN: Brass/Tin-plated

Wafer: PA66 UL94V-2/Natural

*Suitable LDZY C5080 series Housing

C5080WVK-04-N2NAT

5.08mm Pitch 180° Single Row Wafer

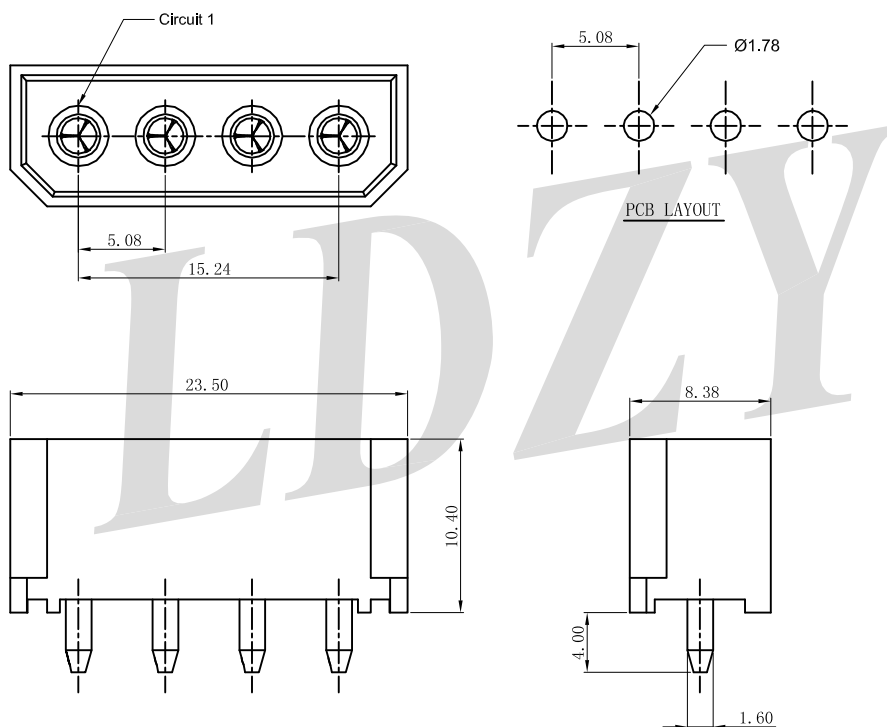

Reference Informations:

*Material:

PIN: Brass/Tin-plated

Wafer: PA66 UL94V-2/ Natural

*Suitable LDZY C5080 series Housing