


SPECIFICATIONS:

Voltage Rating: 600V AC/DC
Current Rating: 12A AC/DC
Withstanding Voltage: 600V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 10mΩ Max.
Applicable Wire Range: AWG#12~16.

Assembly Layout:

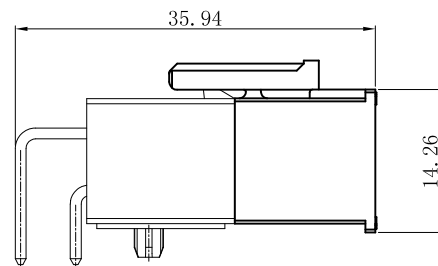

C5705HF-2NP-N2BK

5.70mm Pitch Dual Row Housing

Reference Informations:

*Material:


Housing: PA66 UL94V-0/Natural

*Suitable LDZY C3755 series Terminal

*Mates with LDZY C3755 Male Housing


Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
2*1P	---	6.35	6.35
2*2P	5.70	12.05	12.05
2*3P	11.40	17.75	17.75
2*4P	17.10	23.45	23.45
2*5P	22.80	29.15	29.15
2*6P	28.50	34.85	34.85
2*7P	34.20	40.55	40.55
2*8P	39.90	46.25	46.25
2*9P	45.60	51.95	51.95
2*10P	51.30	57.65	57.65
2*11P	57.00	63.35	63.35
2*12P	62.70	69.05	69.05

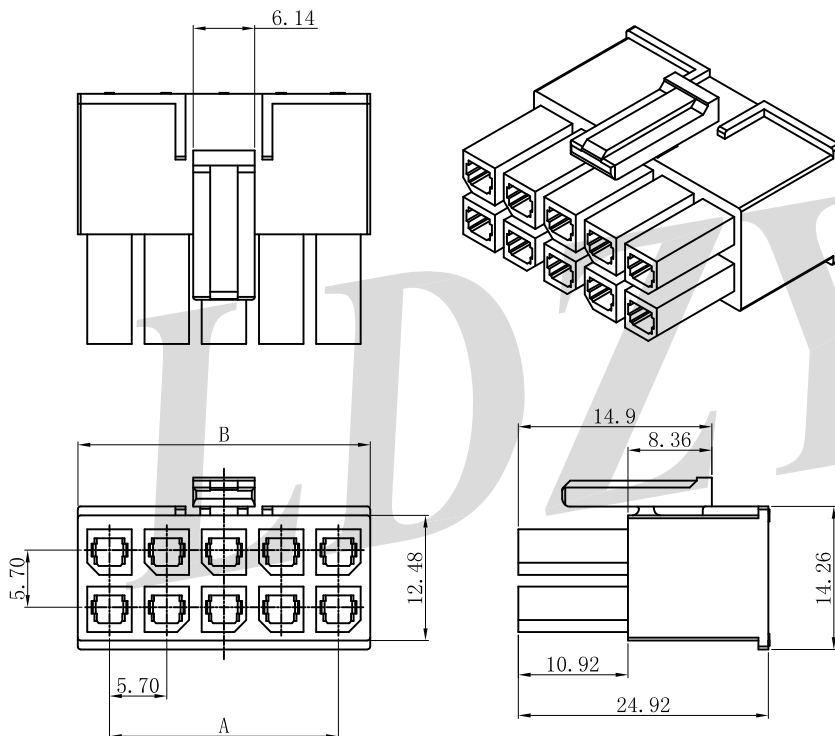

C5704TFX-CT1

5.70mm Pitch Terminal

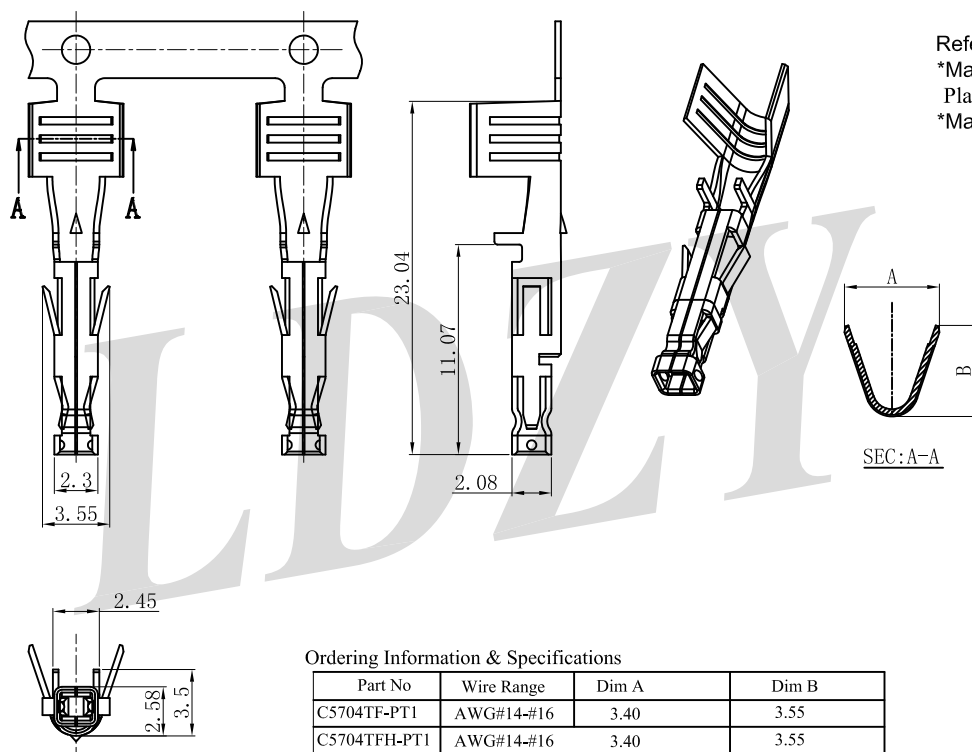

Reference Informations:


- *Material: High Conductivity Copper alloy
- Plating: Tin-plated
- *Mates with LDZY C5704 series Housing

Ordering Information & Specifications

Part No	Wire Range	Dim A	Dim B
C5704TF-PT1	AWG#14-#16	3.40	3.55
C5704TFH-PT1	AWG#14-#16	3.40	3.55

C5704WRF-2NP-L0BKT

5.70mm Pitch 90° Dual Row Wafer

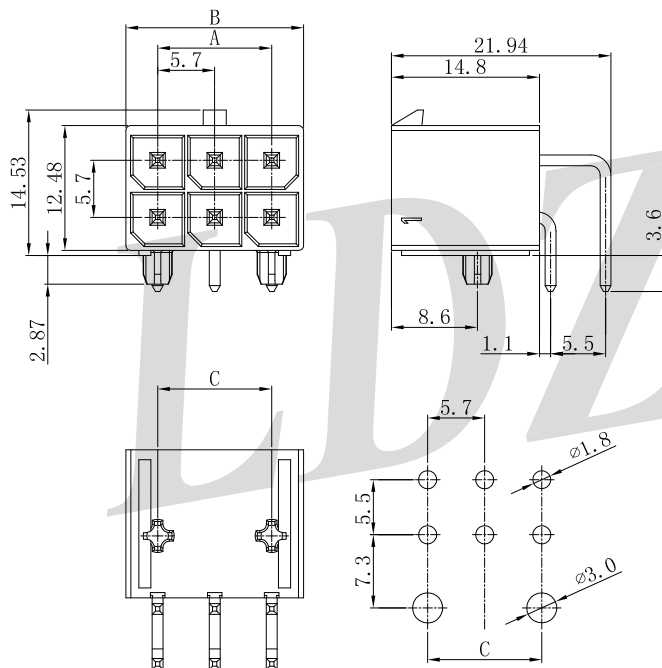

Reference Informations:

- *Material:
- PIN: High Conductivity Copper alloy
- Plating: Tin-plated
- Wafer: LCP UL94V-0/ Black
- *Suitable LDZY C5704 series Housing


Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
2*1P	---	6.35	6.35
2*2P	5.70	12.05	12.05
2*3P	11.40	17.75	17.75
2*4P	17.10	23.45	23.45
2*5P	22.80	29.15	29.15
2*6P	28.50	34.85	34.85
2*7P	34.20	40.55	40.55
2*8P	39.90	46.25	46.25
2*9P	45.60	51.95	51.95
2*10P	51.30	57.65	57.65
2*11P	57.00	63.35	63.35
2*12P	62.70	69.05	69.05

P. C. board layout

C5704WRF-2NP-L0BKT

5.70mm Pitch 180° Dual Row Wafer

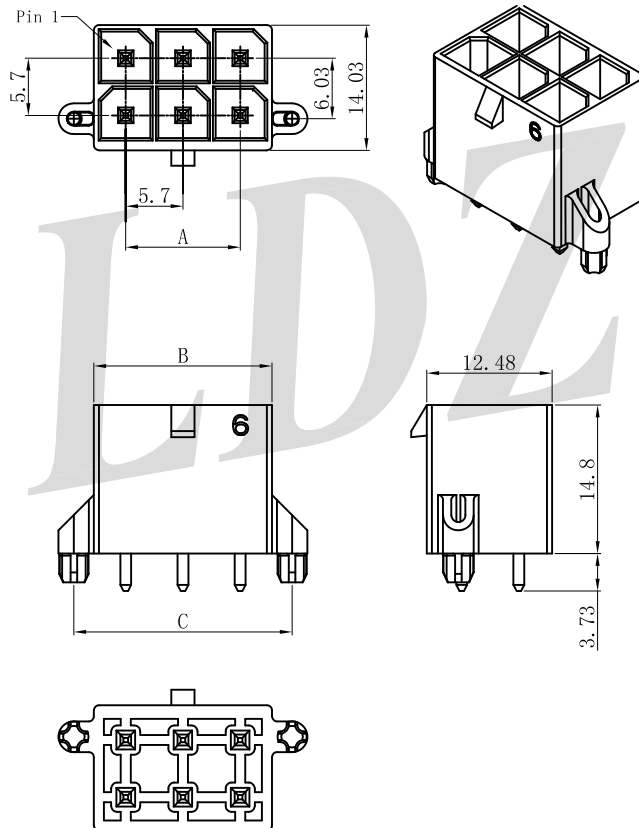

Reference Informations:


*Material:

PIN: High Conductivity Copper alloy

Plating: Tin-plated

Wafer: LCP UL94V-0/ Black

*Suitable LDZY C5704 series Housing

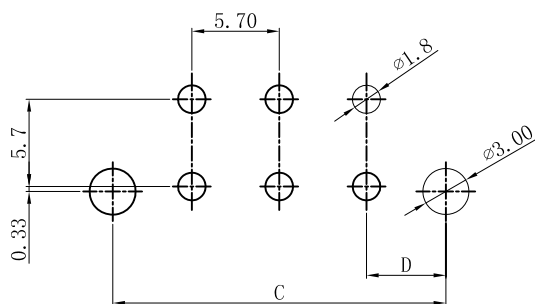

P. C. board layout

Reference Informations:

*Material:

PIN: High Conductivity Copper alloy

Plating: Tin-plated

Wafer: LCP UL94V-0/ Black

*Suitable LDZY C5704 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
2*1P	---	---	---	---
2*2P	5.70	6.35	18.04	6.17
2*3P	11.40	12.05	21.74	5.17
2*4P	17.10	17.75	27.44	5.17
2*5P	22.80	23.45	33.14	5.17
2*6P	28.50	29.15	38.84	5.17
2*7P	34.20	34.85	44.54	5.17
2*8P	39.90	40.55	50.24	5.17
2*9P	45.60	46.25	55.94	5.17
2*10P	51.30	51.95	61.74	5.17
2*11P	57.00	51.65	67.34	5.17
2*12P	62.70	63.35	73.04	5.17