


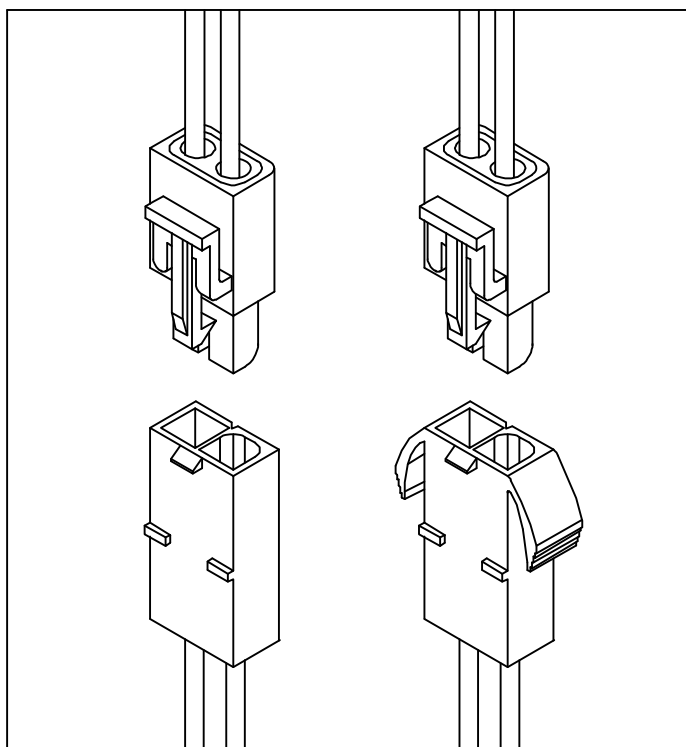

SPECIFICATIONS:

Voltage Rating: 250V AC/DC

Current Rating: 7A AC/DC

Withstanding Voltage: 1500V AC/Minute


Temperature Range: -25°C~+85°C

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 10mΩ Max.


Applicable Wire Range: AWG#14~20.

Assembly Layout:

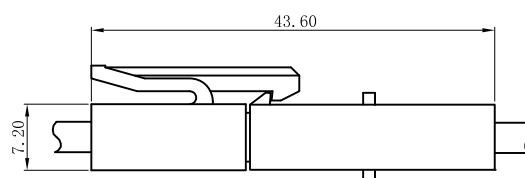

C6200HF-NP-NONA

6.20mm Pitch Single Row Housing

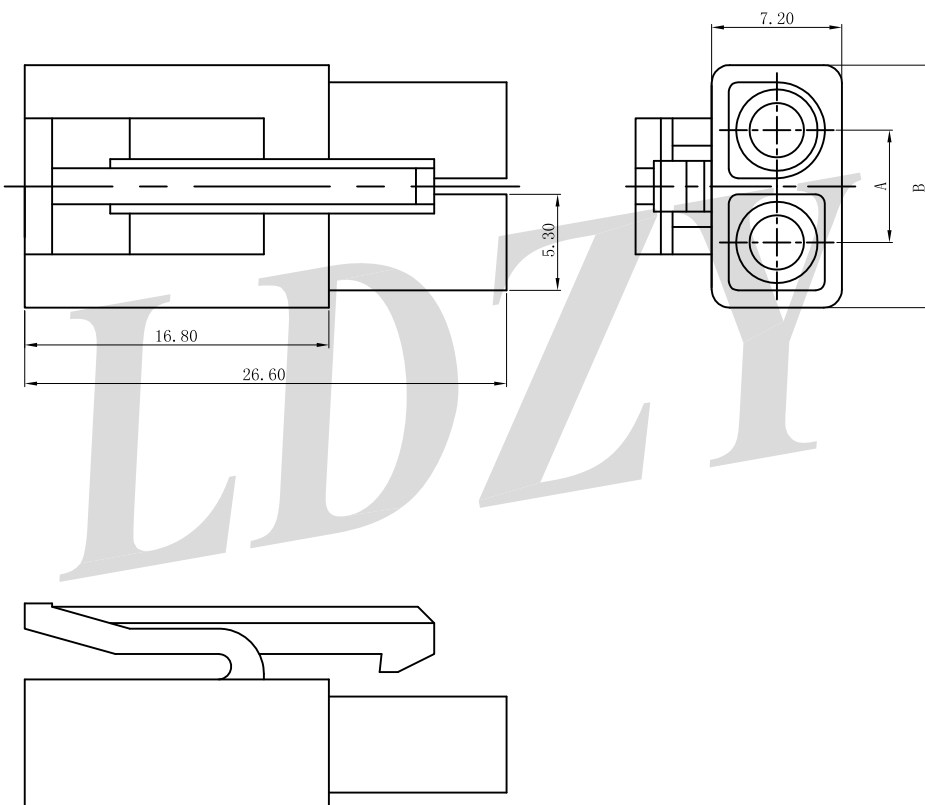

Reference Informations:

*Material:

Housing: PA66 UL94V-0/Natrual

*Suitable LDZY C6200 series Terminal


*Mates with LDZY C6200 Male Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	6.20	13.40
03	12.40	19.50

C6200HM-NP-NONA

6.20mm Pitch Single Row Housing

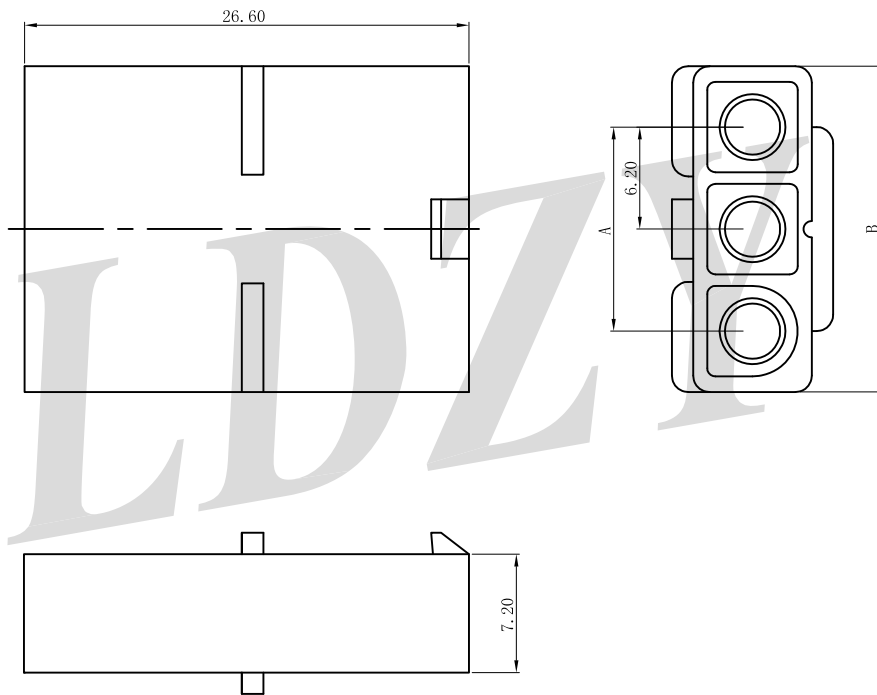

Reference Informations:

*Material:

Housing: PA66 UL94V-0/Natrual

*Suitable LDZY C6200 series Terminal


*Mates with LDZY C6200 Female Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	6.20	13.40
03	12.40	19.50

C6200HMA-NP-NONA

6.20mm Pitch Single Row Housing

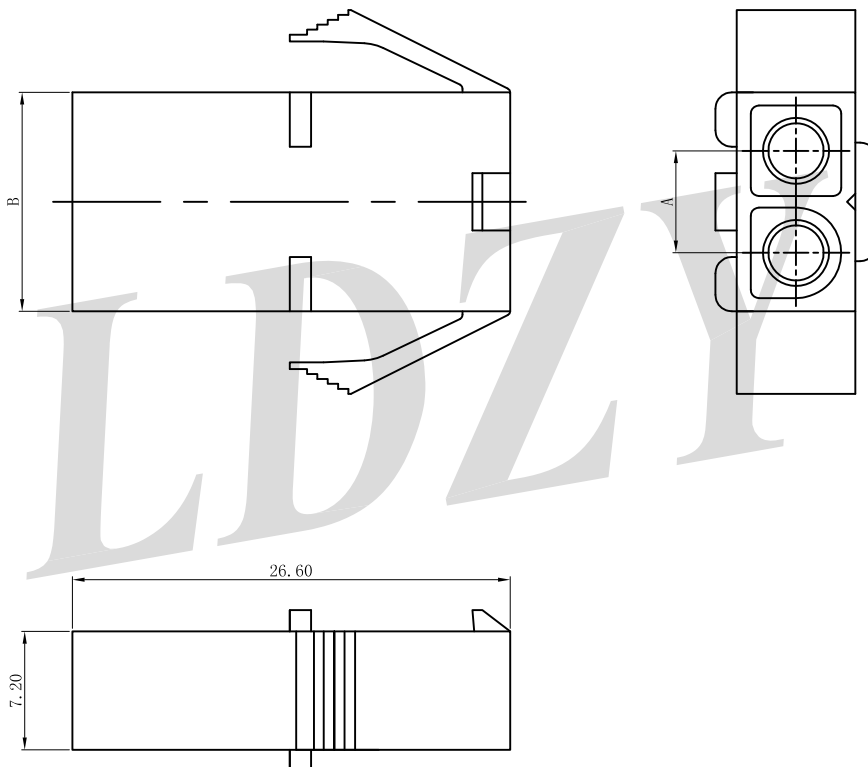

Reference Informations:

*Material:

Housing: PA66 UL94V-0/Natrual

*Suitable LDZY C6200 series Terminal




*Mates with LDZY C6200 Female Housing

Ordering Information & Dimensions


Poles	Dimensions (mm)	
	A	B
02	6.20	13.40
03	12.40	19.50

C6200TF-PT1

6.20mm Pitch Terminal

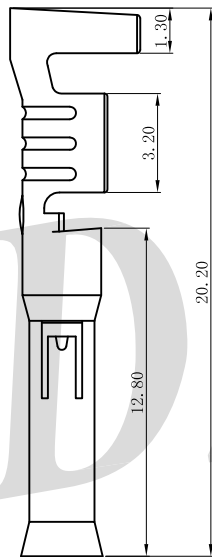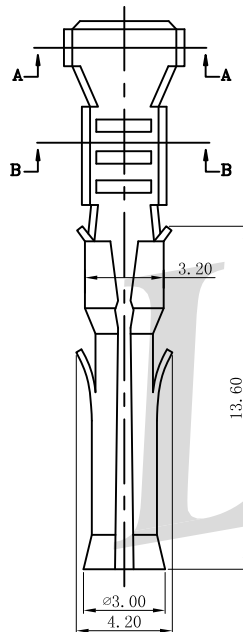

SEC:A-A



SEC:B-B

Reference Informations:

*Material: Phosphor Bronze/Tin-plated




*Mates with LDZY C6200 series Housing

Ordering Information & Specifications


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C6200TF-PT1	AWG#14-#20	3.30mm(max)	Phosphor Bronze	Tin-plated	3,000pcs

C6200TM-PT1

6.20mm Pitch Terminal

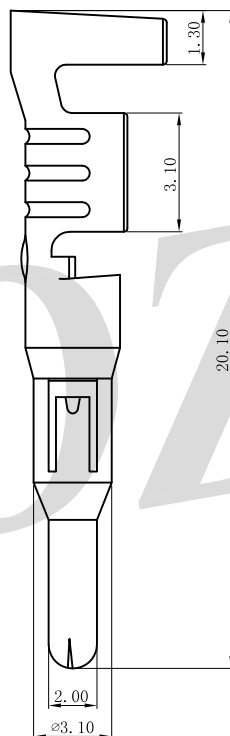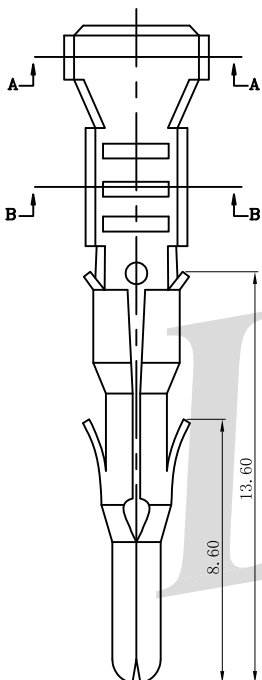

SEC:A-A



SEC:B-B

Reference Informations:

*Material: Phosphor Bronze/Tin-plated

*Mates with LDZY C6200 series Housing

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C6200TM-PT1	AWG#14-#20	3.30mm(max)	Phosphor Bronze	Tin-plated	3,000pcs