



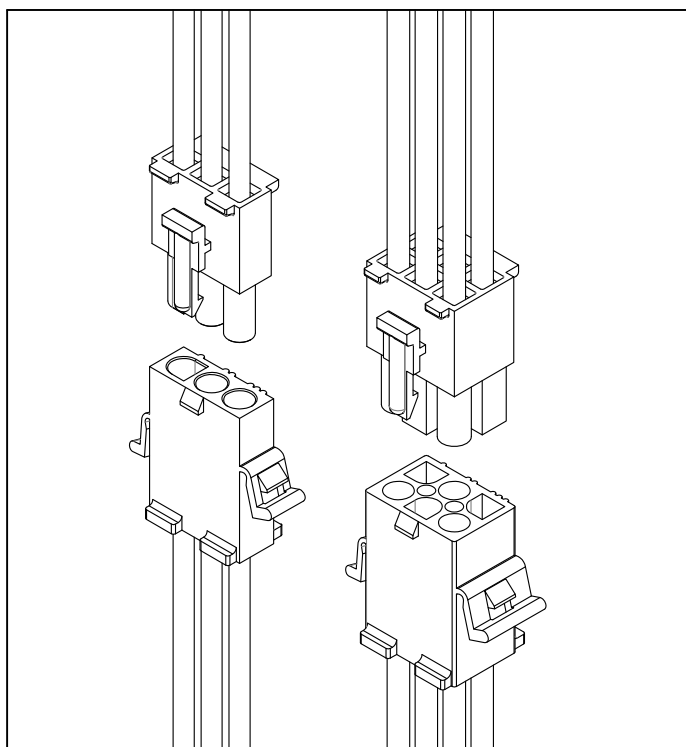

SPECIFICATIONS:

Voltage Rating: 500V AC/DC
Current Rating: 12A AC/DC
Withstanding Voltage: 1500V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Applicable Wire Range: AWG#14~20.

Assembly Layout:

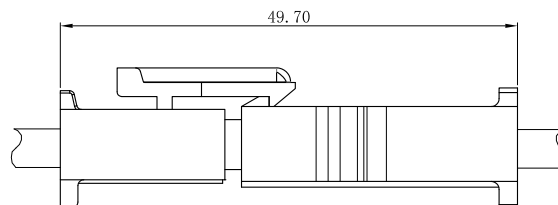

C6700HF-XNP-NONA

6.70mm Pitch Single/Dual Row Housing

Reference Informations:

*Material:



Housing: PA66 UL94V-0/Natrual

*Suitable LDZY C6700 series Terminal

*Mates with LDZY C6700 Male Housing

Ordering Information & Dimensions


Poles	Dimensions (mm)			
	A	B	C	D
02	6.70	-	7.80	14.60
03	13.40	-	7.80	21.30
04	20.10	-	7.80	28.00
06	13.40	6.70	14.60	21.30
09	13.40	13.40	21.30	21.30
12	20.10	13.40	21.30	28.00
15	26.80	13.40	21.30	34.70

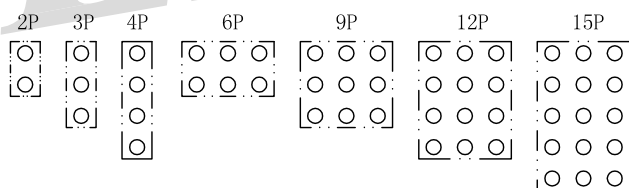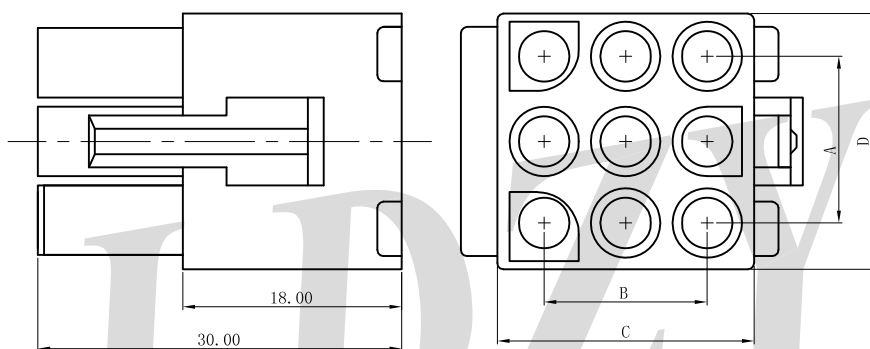

2P~15P孔位排样图

C6700HF-XNP-NONA

6.70mm Pitch Single/Dual Row Housing

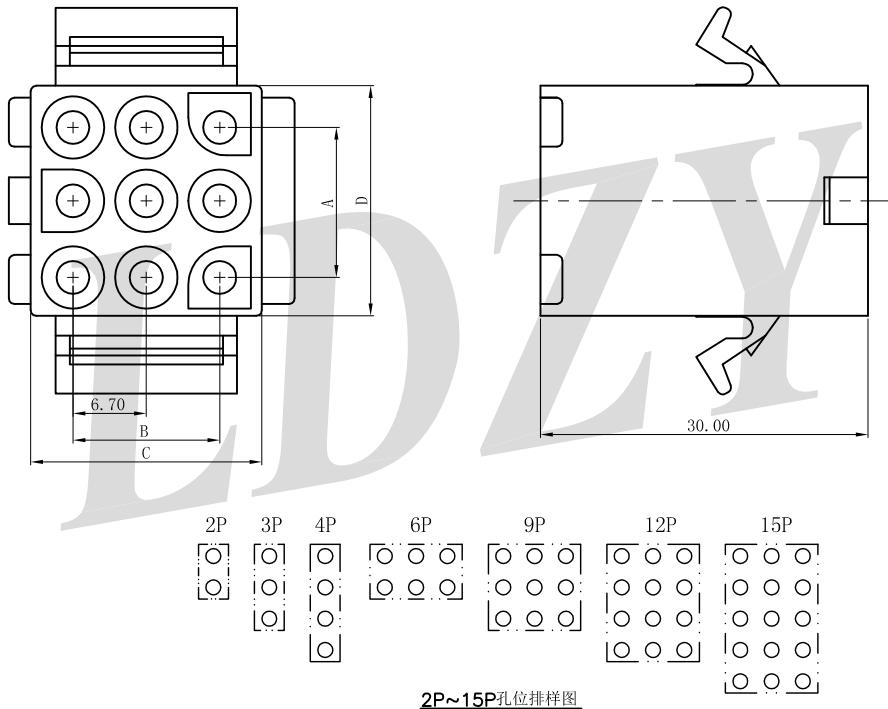

Reference Informations:

*Material:

Housing: PA66 UL94V-0/Natural

*Suitable LDZY C6700 series Terminal


*Mates with LDZY C6700 Female Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
02	6.70	-	8.20	14.90
03	13.40	-	8.20	21.60
04	20.10	-	8.20	28.30
06	13.40	6.70	15.00	21.60
09	13.40	13.40	21.60	21.60
12	20.10	13.40	21.60	28.30
15	26.80	13.40	21.60	35.00

C6700TF-PT1


6.70mm Pitch Terminal

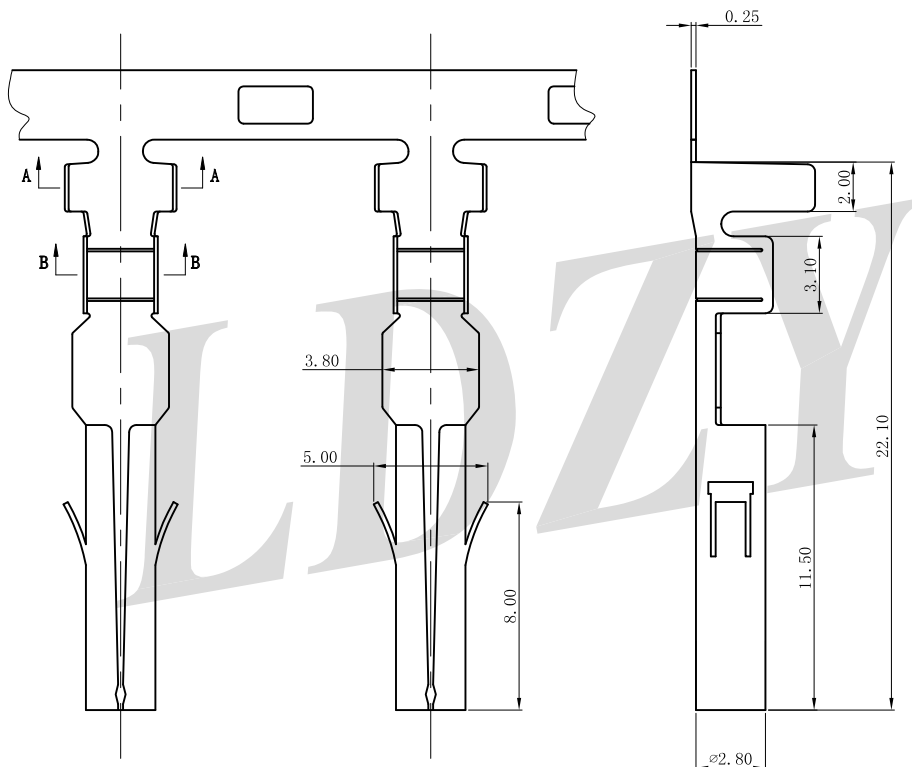

Reference Informations:

*Material: Phosphor Bronze/Tin-plated

*Mates with LDZY C6700 series Housing

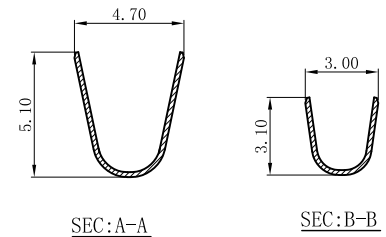

Ordering Information & Specifications



Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C6700TF-PT1	AWG#14-#20	3.30mm(max)	Phosphor Bronze	Tin-plated	2,500pcs

C6700TM-PT1

6.70mm Pitch Terminal

Reference Informations:

- *Material: Phosphor Bronze/Tin-plated
- *Mates with LDZY C6700 series Housing

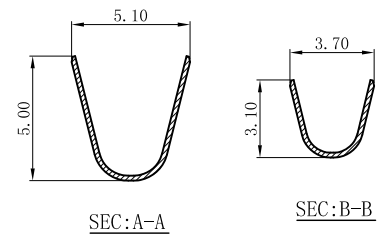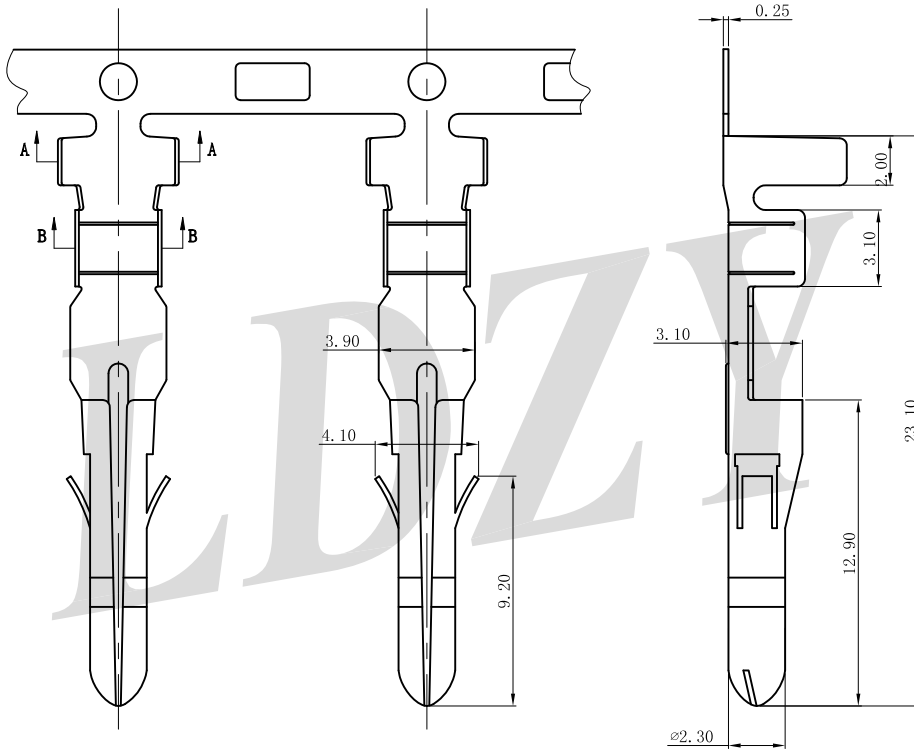

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C6700TM-PT1	AWG#14-#20	3.30mm(max)	Phosphor Bronze	Tin-plated	2,500pcs