


SPECIFICATIONS:

Voltage Rating: 250V AC/DC
Current Rating: 1.2A AC/DC
Withstanding Voltage: 750V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 15mΩ Max.

Assembly Layout:

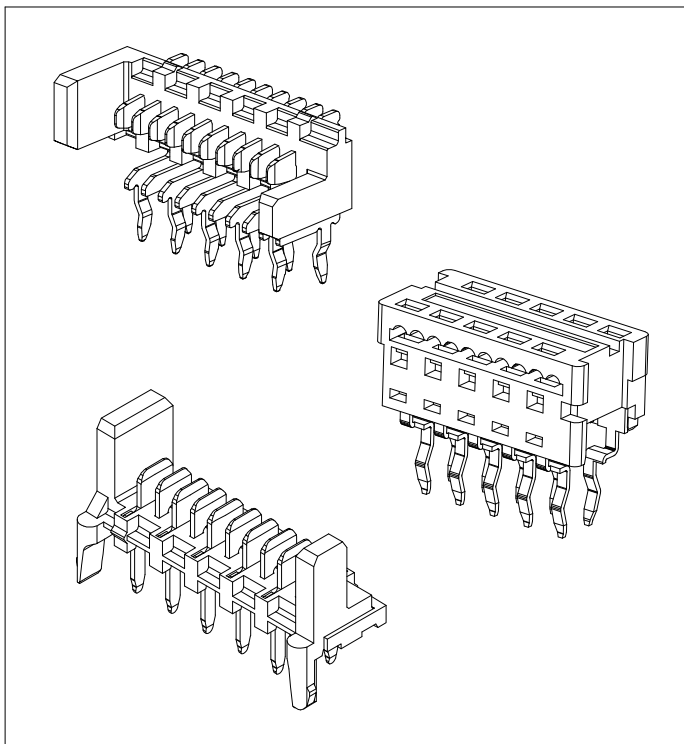

D2558H-2NP-P0WH

2.54mm Pitch Dual Row Housing


Reference Informations:

*Material:

Housing: PBT UL94V-0/White


Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2*2P	7.59	3.81
2*3P	10.13	6.35
2*4P	12.67	8.89
2*5P	15.21	11.43
2*6P	17.75	13.97
2*7P	20.29	16.51
2*8P	22.83	19.05
2*9P	25.37	21.59
2*10P	27.91	24.13
2*11P	30.45	26.67
2*12P	32.99	29.21
2*13P	35.53	31.75

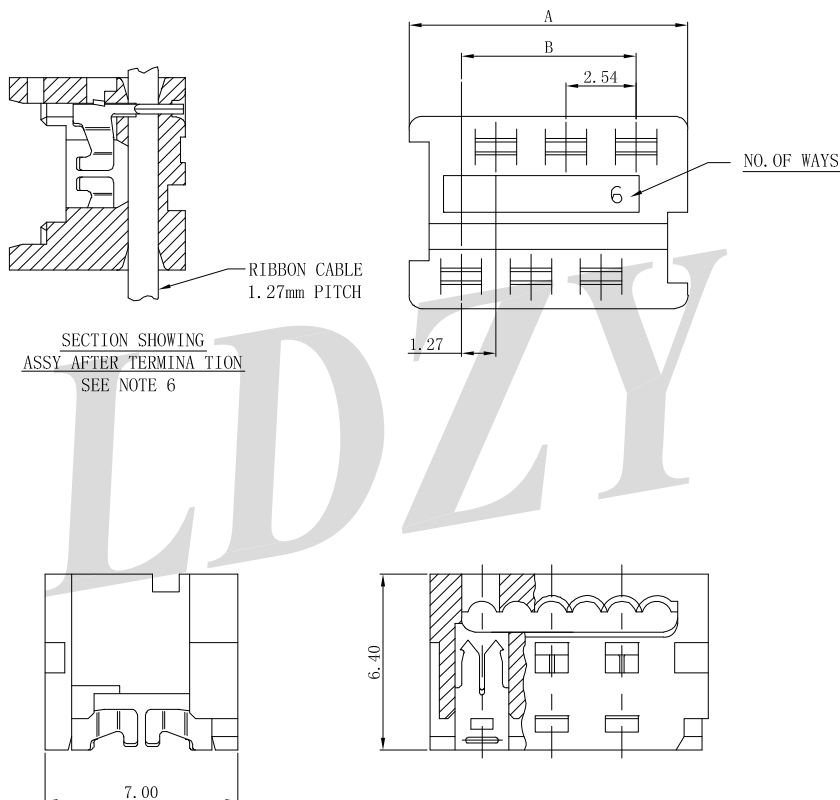

D2558WR-2NP-10NAT

2.54mm Pitch 90° Dual Row IDC/DIP

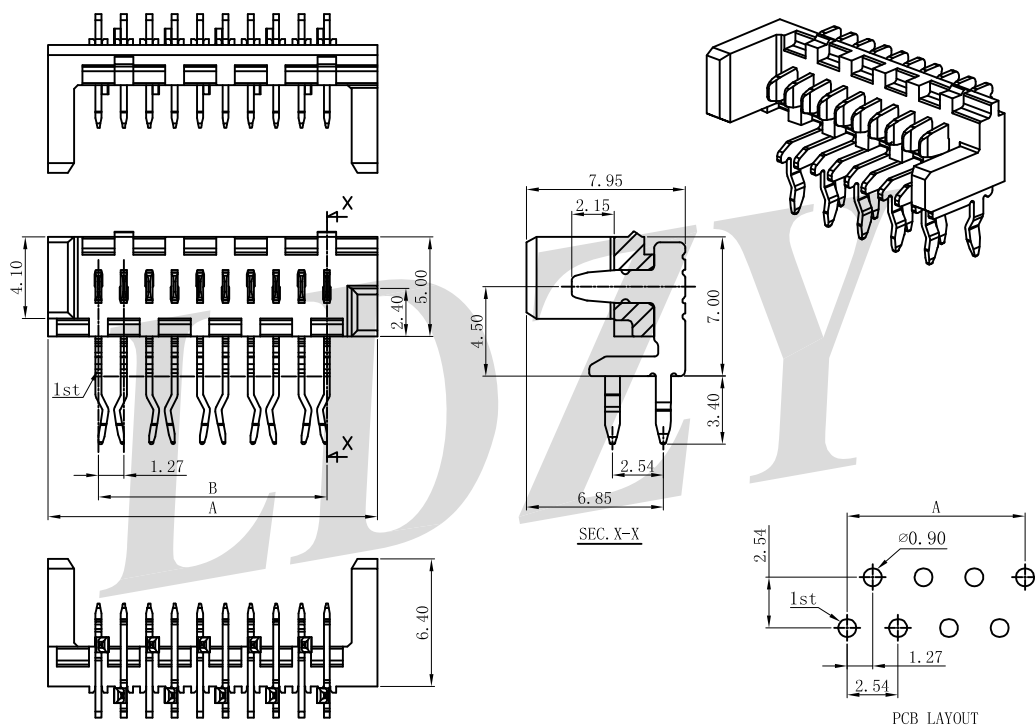

Reference Informations:

*Material:

PIN: Brass/Tin-plated


Wafer: PA10T UL94V-0/ Natural

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2*2P	8.89	3.81
2*3P	11.43	6.35
2*4P	13.97	8.89
2*5P	16.51	11.43
2*6P	19.05	13.97
2*7P	21.59	16.51
2*8P	24.13	19.05
2*9P	26.67	21.59
2*10P	29.21	24.13
2*11P	31.75	26.67
2*12P	34.29	29.21
2*13P	36.83	31.75

D2558WV-2NP-10BKT

2.54mm Pitch 180° Dual Row IDC/DIP

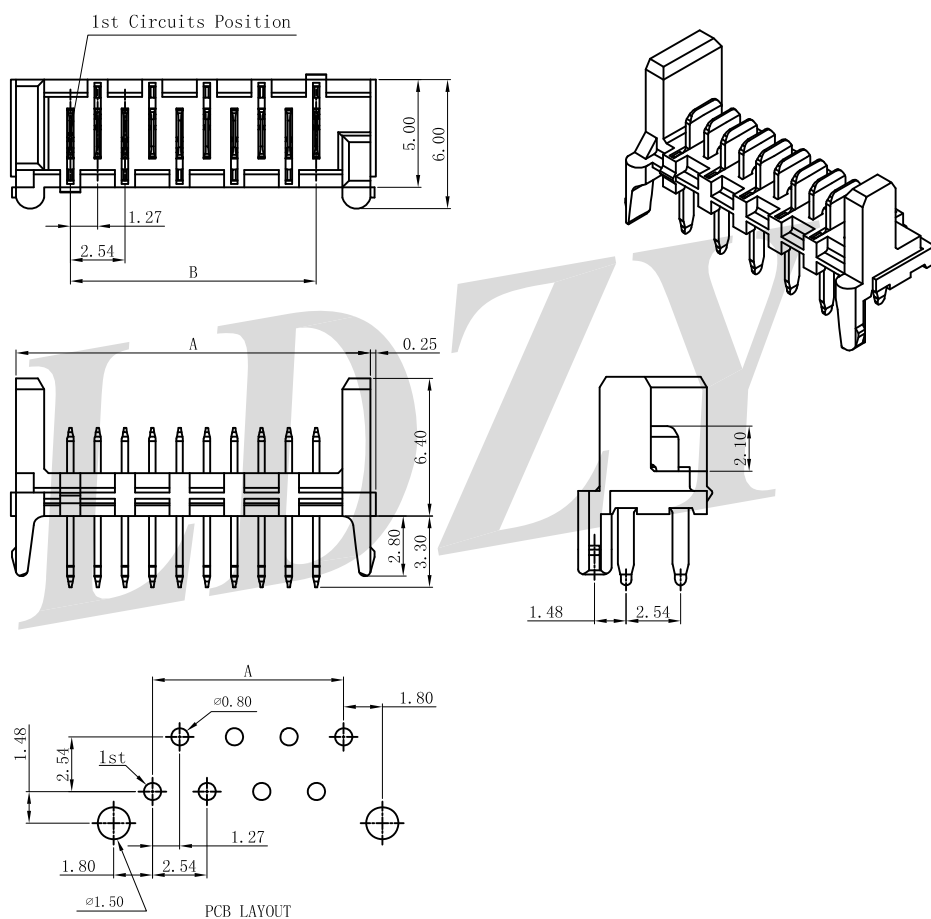

Reference Informations:

*Material:

PIN: Brass/Tin-plated




Wafer: PA10T UL94V-0/ Black

Ordering Information & Dimensions



Poles	Dimensions (mm)	
	A	B
2*2P	8.89	3.81
2*3P	11.40	6.35
2*4P	13.94	8.89
2*5P	16.48	11.43
2*6P	19.02	13.97
2*7P	21.56	16.51
2*8P	24.10	19.05
2*9P	26.64	21.59
2*10P	29.18	24.13
2*11P	31.72	26.67
2*12P	34.26	29.21
2*13P	36.77	31.72

D2558WVD-2NP-P0WHT

2.54mm Pitch 180° Dual Row IDC/DIP

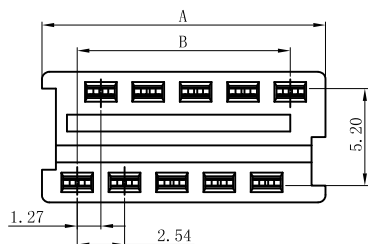

PCB LAYOUT

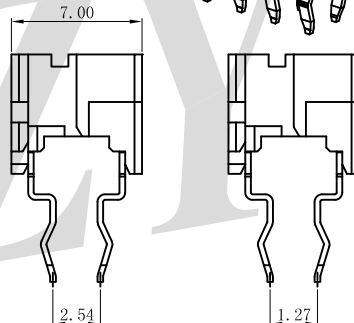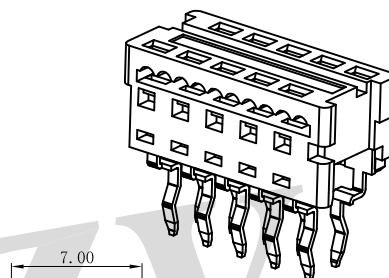

Reference Informations:

*Material:

PIN: Phosphor Bronze/Tin-plated




Wafer: PBT UL94V-0/ White

Ordering Information & Dimensions




Poles	Dimensions (mm)	
	A	B
2*2P	7.59	3.81
2*3P	10.13	6.35
2*4P	12.67	8.89
2*5P	15.21	11.43
2*6P	17.75	13.97
2*7P	20.29	16.51
2*8P	22.83	19.05
2*9P	25.37	21.59
2*10P	27.91	24.13
2*11P	30.45	26.67
2*12P	32.99	29.21
2*13P	35.53	31.72

D2555WVS-2NP-10BKT

2.54mm Pitch 180° Single Row IDC/DIP

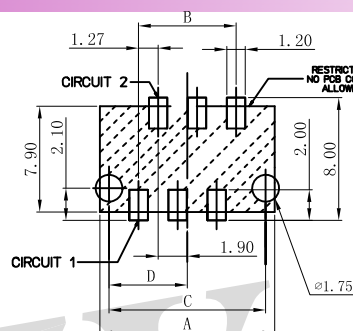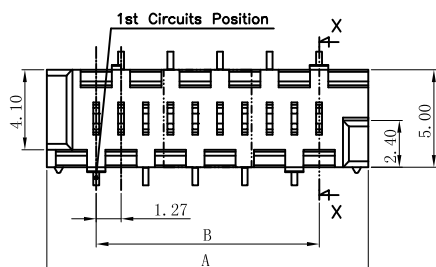

PCB LAYOUT FOR TRANSITION FIT WITH PCB PEGS
HEADER VERSIONS
VIEWED FROM COMPONENT SIDE

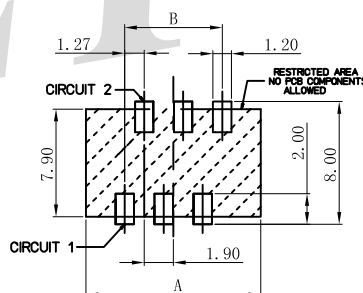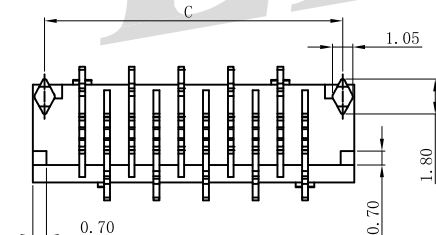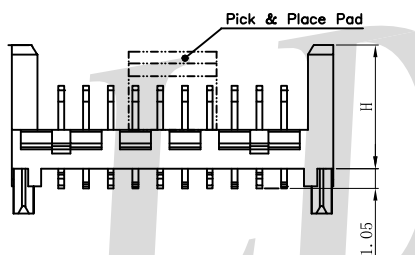

PCB LAYOUT FOR HEADERS WITHOUT PCB PEGS
HEADER VERSIONS
VIEWED FROM COMPONENT SIDE

Reference Informations:

*Material:

PIN: Brass/Tin-plated

Wafer: PA10T UL94V-0/ Black

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
2*2P	8.89	3.81	7.66
2*3P	11.40	6.35	10.20
2*4P	13.94	8.89	12.74
2*5P	16.48	11.43	15.28
2*6P	19.02	13.97	17.82
2*7P	21.56	16.51	20.36
2*8P	24.10	19.05	22.90
2*9P	26.64	21.59	25.44
2*10P	29.18	24.13	27.98
2*11P	31.72	26.67	30.52
2*12P	34.26	29.21	33.06
2*13P	36.77	31.72	35.57