



SPECIFICATIONS:


Voltage Rating: 50V AC/DC
 Current Rating: 1A AC/DC
 Withstanding Voltage: 200V AC/Minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 100MΩ Min.
 Contact Resistance: 20mΩ Max.
 Applicable Wire Range: AWG#28~32.

Assembly Layout:

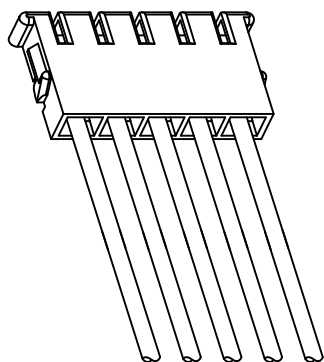

A1205H-NP-XXNA

1.20mm Pitch Single Row Housing

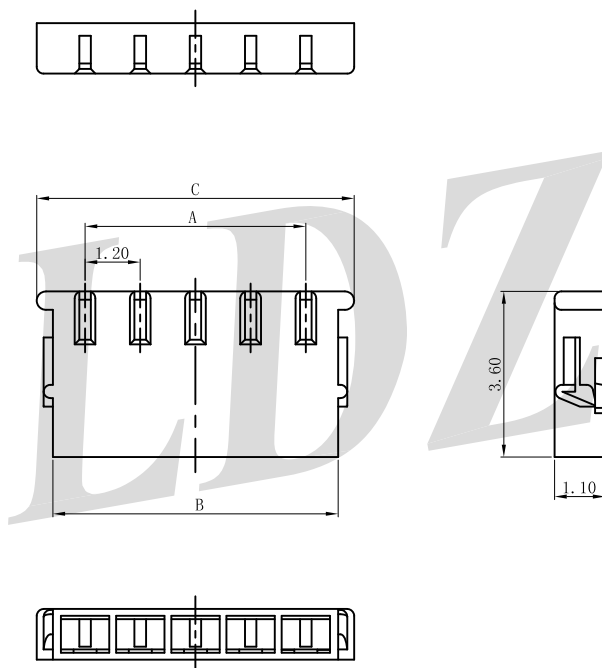

Reference Informations:

*Material:

Housing: PBT,UL94V-0(Standard) Or
 PA66,UL94V-0(Halogen Free)

Color: Natural(White)


*Suitable LDZY A1205 series Terminal

*Mates with LDZY A1205 series Wafer
 Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
02	1.20	2.60	3.30
03	2.40	3.80	4.50
04	3.60	5.00	5.70
05	4.80	6.20	6.90
06	6.00	7.40	8.10
07	7.20	8.60	9.30
08	8.40	9.80	10.50
09	9.60	11.00	11.70

A1205TF-PXX

1.00mm Pitch Terminal

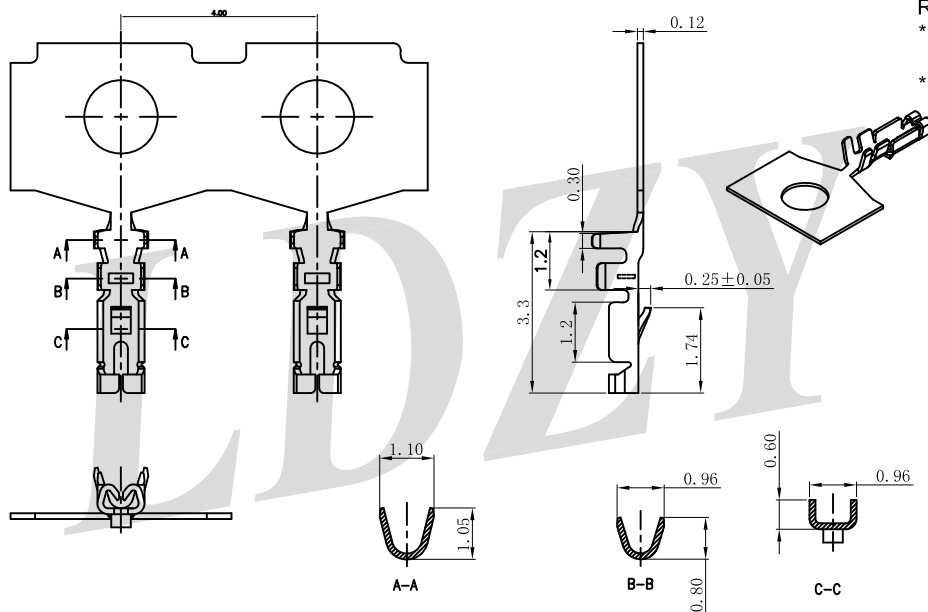

Reference Informations:

*Material: Phosphor Bronze

Finish: Tin-plated Or Gold-plated


*Mates with LDZY A1205 series Housing

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1205TF-PT1	AWG#28-#32	0.8mm(max)	Phosphor Bronze	Tin Plated	20,000pcs
A1205TF-PG1	AWG#28-#32	0.8mm(max)	Phosphor Bronze	Gold-plated	20,000pcs

A1205WRS-07-L0NA

1.20mm Pitch Pitch 90° SMT Single Row Wafer

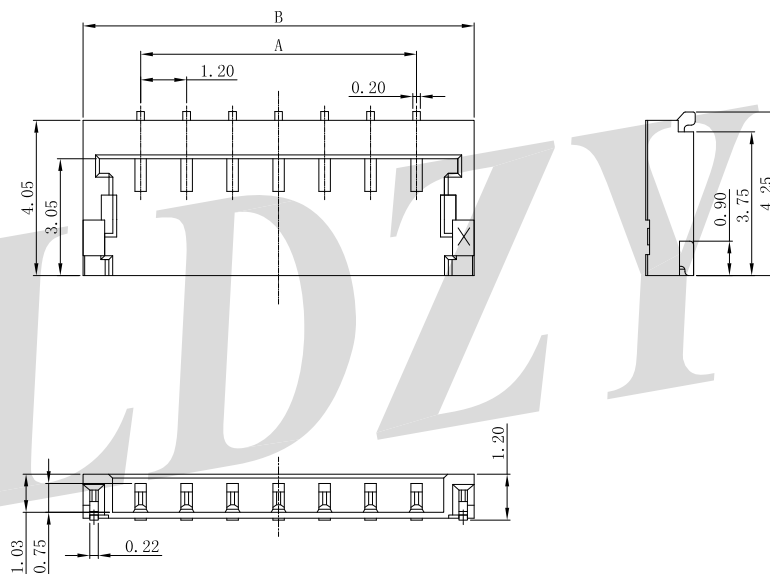

Reference Informations:

*Material:

PIN: Phosphor Bronze /Gold-flash

Solder Tabs: Phosphor Bronze/Tin-plated

Wafer: PA9T,UL94V-0 / Natrual

LCP,UL94V-0 / Natrual


*Suitable LDZY A1205 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	1.20	4.20
03	2.40	5.40
04	3.60	6.60
05	4.80	7.80
06	6.00	9.00
07	7.20	10.20
08	8.40	11.40
09	9.60	12.60

A1205TF-PXX

1.00mm Pitch Terminal

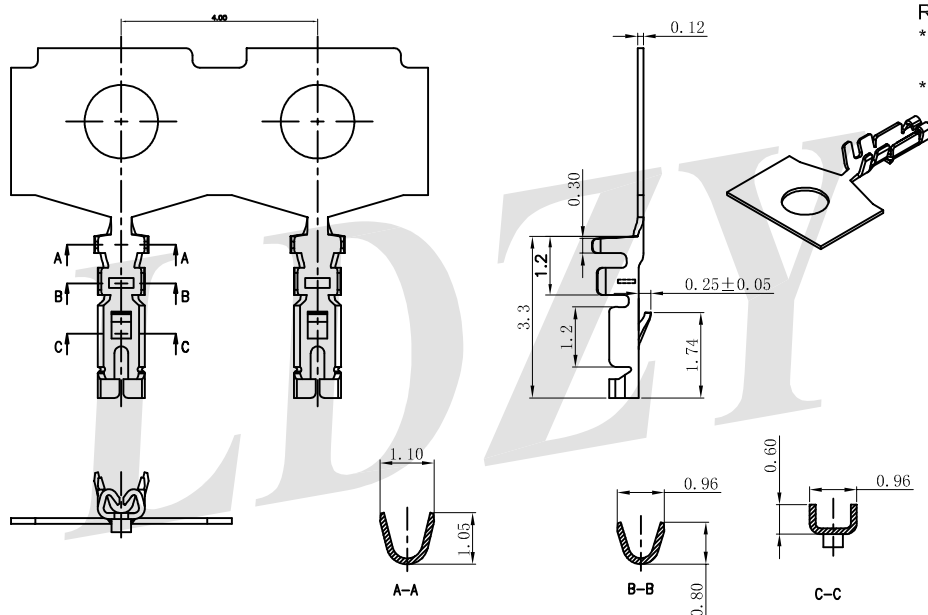

Reference Informations:

*Material: Phosphor Bronze

Finish: Tin-plated Or Gold-plated


*Mates with LDZY A1205 series Housing

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1205TF-PT1	AWG#28-#32	0.8mm(max)	Phosphor Bronze	Tin Plated	20,000pcs
A1205TF-PG1	AWG#28-#32	0.8mm(max)	Phosphor Bronze	Gold-plated	20,000pcs

A1205WRS-07-L0NA

1.20mm Pitch Pitch 90° SMT Single Row Wafer

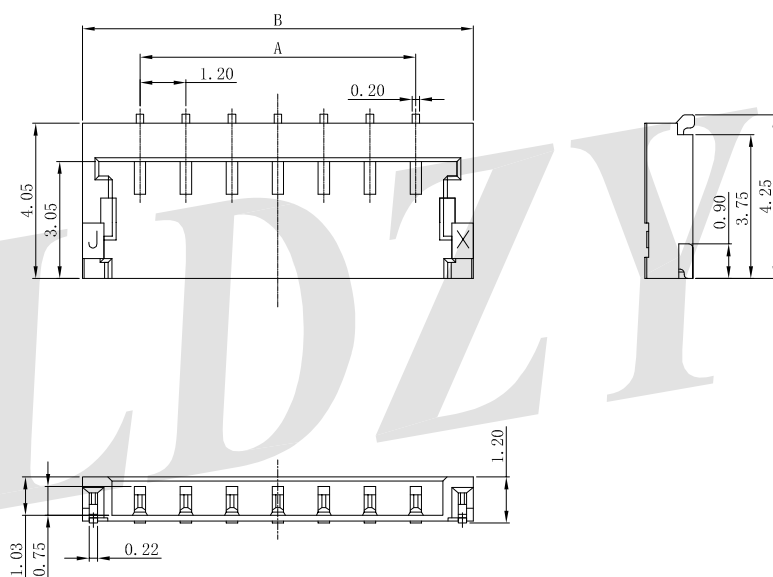

Reference Informations:

*Material:

PIN: Phosphor Bronze /Gold-flash

Solder Tabs: Phosphor Bronze/Tin-plated

Wafer: PA9T,UL94V-0 / Natrual

LCP,UL94V-0 / Natrual

*Suitable LDZY A1205 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
02	1.20	4.20	3.30
03	2.40	5.40	4.50
04	3.60	6.60	5.70
05	4.80	7.80	6.90
06	6.00	9.00	8.10
07	7.20	10.20	9.30
08	8.40	11.40	10.50
09	9.60	12.60	11.70